



Report on

GEN-2017-047 Modification Request Impact Study

Revision R1 August 6, 2024

Submitted to
Southwest Power Pool



anedenconsulting.com

TABLE OF CONTENTS

Revision History.....	R-1
Executive Summary.....	ES-1
1.0 Scope of Study	1
1.1 Reactive Power Analysis	1
1.2 Short Circuit Analysis & Stability Analysis	1
1.3 Steady-State Analysis	1
1.4 Study Limitations.....	1
2.0 Project and Modification Request.....	2
3.0 Existing vs Modification Comparison	4
3.1 Stability Model Parameters Comparison	4
3.2 Equivalent Impedance Comparison Calculation.....	4
4.0 Reactive Power Analysis	5
4.1 Methodology and Criteria	5
4.2 Results.....	5
5.0 Short Circuit Analysis.....	6
5.1 Methodology	6
5.2 Results.....	6
6.0 Dynamic Stability Analysis	8
6.1 Methodology and Criteria	8
6.2 Fault Definitions	8
6.3 Results.....	15
7.0 Material Modification Determination	18
7.1 Results.....	18

LIST OF TABLES

Table ES-1: GEN-2017-047 Modification Request..... ES-1
 Table 2-1: GEN-2017-047 Modification Request..... 3
 Table 4-1: Shunt Reactor Size for Reactive Power Analysis..... 5
 Table 5-1: Short Circuit Model Parameters* 6
 Table 5-2: POI Short Circuit Comparison Results..... 6
 Table 5-3: 25SP Short Circuit Comparison Results..... 7
 Table 6-1: Fault Definitions..... 9
 Table 6-2: GEN-2017-047 Dynamic Stability Results 15

LIST OF FIGURES

Figure 2-1: GEN-2017-047 Single Line Diagram (Existing Configuration*) 2
 Figure 2-2: GEN-2017-047 Single Line Diagram (Modification Configuration)..... 2
 Figure 4-1: GEN-2017-047 Single Line Diagram (Shunt Sizes) 5

APPENDICES

- APPENDIX A: GEN-2017-047 Generator Dynamic Model
- APPENDIX B: Short Circuit Results
- APPENDIX C: Dynamic Stability Results with Existing Base Case Issues & Simulation Plots

Revision History

DATE OR VERSION NUMBER	AUTHOR	CHANGE DESCRIPTION
8/6/2024	Aneiden Consulting	Initial Report Issued

Executive Summary

Aneden Consulting (Aneden) was retained by the Southwest Power Pool (SPP) to perform a Modification Request Impact Study (Study) for GEN-2017-047, an active Generation Interconnection Request (GIR) with a Point of Interconnection (POI) at the Bull Creek 115 kV Substation (studied at the Cole 115 kV Substation in this analysis to be consistent with the previous DISIS conditions).

The GEN-2017-047 project interconnects in the Xcel Energy (Formerly Southwestern Public Service) control area with a capacity of 102 MW. This Study has been requested to evaluate the modification of GEN-2017-047 to change the configuration to 31 x GE 2.82 MW + 5 x GE 2.52 MW wind turbines for a total dispatch of 100.02 MW.

In addition, the modification request included changes to the collection system, generator step-up transformers, main substation transformers, and generation interconnection line. The existing and modified configurations for GEN-2017-047 are shown in Table ES-1 below.

Table ES-1: GEN-2017-047 Modification Request

Facility	Existing Configuration	Modification Configuration	
Point of Interconnection	Cole 115 kV Substation (523120)	Bull Creek 115 kV Substation [Studied at the Cole 115 kV Substation (523120)]	
Configuration/Capacity	51 x GE 2.0 MW (wind) = 102 MW	31 x GE 2.82 MW + 5 x GE 2.52 MW (wind) = 100.02 MW [dispatch]	
Generation Interconnection Line	Length = 4.9 miles R = 0.000432 pu X = 0.002617 pu B = 0.000390 pu Rating MVA = 0.0 MVA	Length = 0.153 miles R = 0.000097 pu X = 0.000828 pu B = 0.000122 pu Rating MVA = 150 MVA	
Main Substation Transformer ¹	X = 7.996%, R = 0.2665%, Winding MVA = 69 MVA, Rating MVA = 115 MVA	X = 8.197%, R = 0.211%, Winding MVA = 69 MVA, Rating MVA = 115 MVA	
Equivalent GSU Transformer ¹	Gen 1 Equivalent Qty: 51 X = 5.699%, R = 0.759%, Winding MVA = 117.3 MVA, Rating MVA = 117.3 MVA	Gen 1 Equivalent Qty: 31 X = 5.722%, R = 0.572%, Winding MVA = 86.8 MVA, Rating MVA = 100.4 MVA	Gen 2 Equivalent Qty: 5 X = 5.727%, R = 0.517%, Winding MVA = 12.5 MVA, Rating MVA = 14.8 MVA
Equivalent Collector Line ²	R = 0.003600 pu X = 0.003160 pu B = 0.015380 pu	R = 0.006631 pu X = 0.013157 pu B = 0.039835 pu	
Generator Dynamic Model ³ & Power Factor	51 x GE 2.0 MW (GEWTGCU1) ³ Leading: 0.99 Lagging: 0.99	31 x 2.82 MW (GEWTG0705) ³ Leading: 0.9 Lagging: 0.9	5 x GE 2.52 MW (GEWTG0705) ³ Leading: 0.9 Lagging: 0.9

1) X and R based on Winding MVA, 2) All pu are on 100 MVA Base 3) DYR stability model name

SPP determined that steady-state analysis was not required because the modifications to the project were not significant enough to change the previously studied steady-state conclusions. However, SPP determined that while the modification used the same turbine manufacturer, GE, the change in stability model from GEWTGCU1 to GEWTG0705 required short circuit and dynamic stability analyses.

The scope of this study included reactive power analysis, short circuit analysis, and dynamic stability analysis.

Aneden performed the analyses using the modification request data and the DISIS-2018-002/2019-001 study models:

- 2025 Summer Peak (25SP),
- 2025 Winter Peak (25WP)

All analyses were performed using the Siemens PTI PSS/E¹ version 34 software and the results are summarized below.

The results of the reactive power analysis using the 25SP model showed that the GEN-2017-047 project needed a 4 MVar shunt reactor on the 34.5 kV bus of the project substation with the modifications in place, an increase from the 1.67 MVar found in the DISIS-2017-001-2 study². This is necessary to offset the capacitive effect on the transmission network caused by the project's transmission line and collector system during reduced generation conditions. The information gathered from the reactive power analysis is provided as information to the Interconnection Customer and Transmission Owner (TO) and/or Transmission Operator (TOP). The applicable reactive power requirements will be further reviewed by the TO and/or TOP.

The short circuit analysis was performed using the 25SP stability model modified for short circuit analysis. The results from the short circuit analysis with the updated topology showed that the maximum GEN-2017-047 contribution to three-phase fault currents in the immediate transmission systems at or near the GEN-2017-047 POI was 1.34 kA. The maximum three-phase fault current level within 5 buses of the POI was 17.4 kA for the 25SP model.

The dynamic stability analysis was performed using Siemens PTI PSS/E version 34.8.0 software for the two modified study models: 25SP and 25WP. 60 fault events were simulated, which included three-phase faults and single-line-to-ground stuck breaker faults.

The results of the dynamic stability analysis showed several existing base case issues that were found in both the original DISIS-2018-002/2019-001 model and in the model with the GEN-2017-047 modification included. These issues were not attributed to the GEN-2017-047 modification request and are detailed in Appendix C.

There were no damping or voltage recovery violations attributed to the GEN-2017-047 modification request observed during the simulated faults. Additionally, the project was found to stay connected during the contingencies that were studied and, therefore, will meet the Low Voltage Ride Through (LVRT) requirements of FERC Order #661A.

¹ Power System Simulator for Engineering

² DISIS-2017-001-2 Restudy of Stability and Short Circuit Analysis – June 16, 2022

Based on the results of the study, SPP determined that the requested modification is **not a Material Modification**. The requested modification does not have a material adverse impact on the cost or timing of any other Interconnection Request with a later Queue priority date.

In accordance with FERC Order No. 827, the generating facility will be required to provide dynamic reactive power within the range of 0.95 leading to 0.95 lagging at the high-side of the generator substation.

It is likely that the customer may be required to reduce its generation output to 0 MW in real-time, also known as curtailment, under certain system conditions to allow system operators to maintain the reliability of the transmission network.

Nothing in this study should be construed as a guarantee of transmission service or delivery rights. If the customer wishes to obtain deliverability to final customers, a separate request for transmission service must be requested on Southwest Power Pool's OASIS by the customer.

1.0 Scope of Study

Aneden Consulting (Aneden) was retained by the Southwest Power Pool (SPP) to perform a Modification Request Impact Study (Study) for GEN-2017-047. A Modification Request Impact Study is a generation interconnection study performed to evaluate the impacts of modifying the DISIS study assumptions. The determination of the required scope of the study is dependent upon the specific modification requested and how it may impact the results of the DISIS study. Impacting the DISIS results could potentially affect the cost or timing of any Interconnection Request with a later Queue priority date, deeming the requested modification a Material Modification. The criteria sections below include reasoning as to why an analysis was either included or excluded from the scope of study.

All analyses were performed using the Siemens PTI PSS/E version 34 software. The results of each analysis are presented in the following sections.

1.1 Reactive Power Analysis

SPP requires that a reactive power analysis be performed on the requested configuration if it is a non-synchronous resource. The reactive power analysis determines the capacitive effect at the POI caused by the project's collection system and transmission line's capacitance. A shunt reactor size was determined to offset the capacitive effect and maintain zero (0) MVAR injection at the POI while the plant's generators and capacitors were offline.

1.2 Short Circuit Analysis & Stability Analysis

To determine whether stability and short circuit analyses are required, SPP evaluates the difference between the stability models, the stability model parameters and, if needed, the equivalent collector system impedance between the existing configuration and the requested modification. Dynamic stability analysis and short circuit analysis would be required if the differences listed above were determined to have a significant impact on the most recently performed DISIS stability analysis.

1.3 Steady-State Analysis

Steady-state analysis is performed if SPP deems it necessary based on the nature of the requested change. SPP determined that steady-state analysis was not required because the modifications to the project were not significant enough to change the previously studied steady-state conclusions.

1.4 Study Limitations

The assessments and conclusions provided in this report are based on assumptions and information provided to Aneden by others. While the assumptions and information provided may be appropriate for the purposes of this report, Aneden does not guarantee that those conditions assumed will occur. In addition, Aneden did not independently verify the accuracy or completeness of the information provided. As such, the conclusions and results presented in this report may vary depending on the extent to which actual future conditions differ from the assumptions made or information used herein.

2.0 Project and Modification Request

The GEN-2017-047 Interconnection Customer requested a modification to its Generation Interconnection Request (GIR) with a Point of Interconnection (POI) at the Bull Creek 115 kV Substation (studied at the Cole 115 kV Substation in this analysis to be consistent with the previous DISIS conditions). GEN-2017-047 is in the Xcel Energy (Formerly Southwestern Public Service) control area.


At the time of report posting, GEN-2017-047 is an active Interconnection Request with a queue status of “IA FULLY EXECUTED/ON SCHEDULE.” GEN-2017-047 is a wind facility with a maximum summer and winter queue capacity of 102 MW with Energy Resource Interconnection Service (ERIS) and Network Resource Interconnection Service (NRIS).

The GEN-2017-047 project is currently in the DISIS-2017-001 cluster. Figure 2-1 shows the power flow model single line diagram for the existing GEN-2017-047 configuration using the DISIS-2018-002/2019-001 25SP stability model.

This Study has been requested to evaluate the modification of GEN-2017-047 to change the configuration to 31 x GE 2.82 MW + 5 x GE 2.52 MW wind turbines for a total dispatch of 100.02 MW

In addition, the modification request included changes to the collection system, generator step-up transformers, main substation transformers, and generation interconnection line. Figure 2-2 shows the power flow model single line diagram for the GEN-2017-047 modification. The existing and modified configurations for GEN-2017-047 are shown in Table 2-1 below.

Figure 2-1: GEN-2017-047 Single Line Diagram (Existing Configuration*)

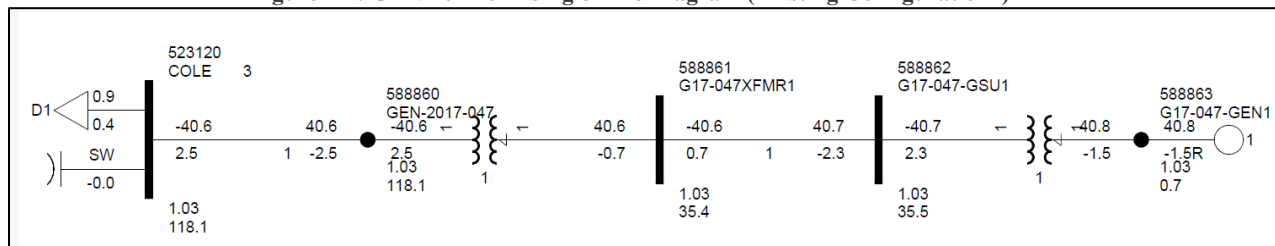

*based on the DISIS-2018-002/2019-001 25SP stability models

Figure 2-2: GEN-2017-047 Single Line Diagram (Modification Configuration)

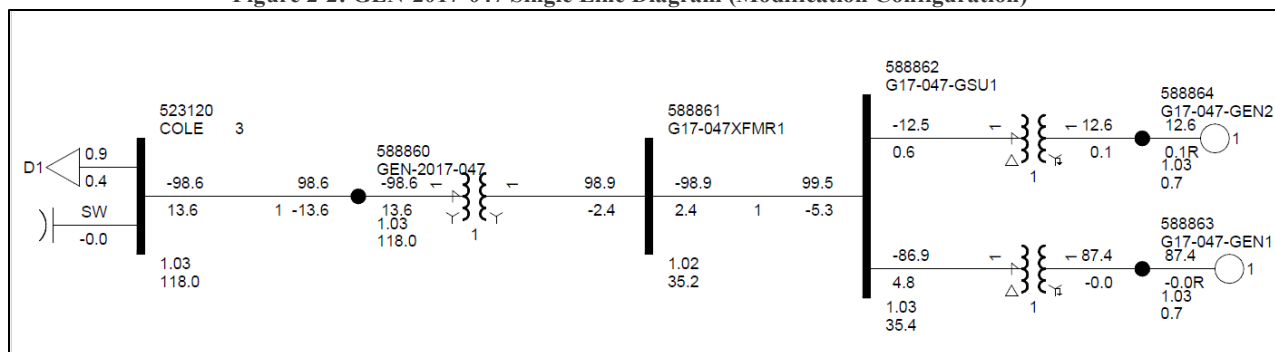


Table 2-1: GEN-2017-047 Modification Request

Facility	Existing Configuration	Modification Configuration	
Point of Interconnection	Cole 115 kV Substation (523120)	Bull Creek 115 kV Substation [Studied at the Cole 115 kV Substation (523120)]	
Configuration/Capacity	51 x GE 2.0 MW (wind) = 102 MW	31 x GE 2.82 MW + 5 x GE 2.52 MW (wind) = 100.02 MW [dispatch]	
Generation Interconnection Line	Length = 4.9 miles R = 0.000432 pu X = 0.002617 pu B = 0.000390 pu Rating MVA = 0.0 MVA	Length = 0.153 miles R = 0.000097 pu X = 0.000828 pu B = 0.000122 pu Rating MVA = 150 MVA	
Main Substation Transformer ¹	X = 7.996%, R = 0.2665%, Winding MVA = 69 MVA, Rating MVA = 115 MVA	X = 8.197%, R = 0.211%, Winding MVA = 69 MVA, Rating MVA = 115 MVA	
Equivalent GSU Transformer ¹	Gen 1 Equivalent Qty: 51 X = 5.699%, R = 0.759%, Winding MVA = 117.3 MVA, Rating MVA = 117.3 MVA	Gen 1 Equivalent Qty: 31 X = 5.722%, R = 0.572%, Winding MVA = 86.8 MVA, Rating MVA = 100.4 MVA	Gen 2 Equivalent Qty: 5 X = 5.727%, R = 0.517%, Winding MVA = 12.5 MVA, Rating MVA = 14.8 MVA
Equivalent Collector Line ²	R = 0.003600 pu X = 0.003160 pu B = 0.015380 pu	R = 0.006631 pu X = 0.013157 pu B = 0.039835 pu	
Generator Dynamic Model ³ & Power Factor	51 x GE 2.0 MW (GEWTGCU1) ³ Leading: 0.99 Lagging: 0.99	31 x 2.82 MW (GEWTG0705) ³ Leading: 0.9 Lagging: 0.9	5 x GE 2.52 MW (GEWTG0705) ³ Leading: 0.9 Lagging: 0.9

1) X and R based on Winding MVA, 2) All pu are on 100 MVA Base 3) DYR stability model name

3.0 Existing vs Modification Comparison

To determine which analyses are required for the Study, the differences between the existing configuration and the requested modification were evaluated. Aneden performed this comparison and the resulting analyses using a set of modified study models developed based on the modification request data and the DISIS-2018-002/2019-001 study models. The analysis was completed using PSS/E version 34 software.

The methodology and results of the comparisons are described below.

3.1 Stability Model Parameters Comparison

SPP determined that while the modification used the same turbine manufacturer, GE, the change in stability model from GEWTGCU1 to GEWTG0705 required short circuit and dynamic stability analyses. This is because the short circuit contribution and stability responses of the existing configuration and the requested modification's configuration may differ. The generator dynamic model for the modification can be found in Appendix A.

As short circuit and dynamic stability analyses were required, a stability model parameters comparison was not needed for the determination of the scope of the study.

3.2 Equivalent Impedance Comparison Calculation

As the turbine stability model change determined that short circuit and dynamic stability analyses were required, an equivalent impedance comparison was not needed for the determination of the scope of the study.

4.0 Reactive Power Analysis

The reactive power analysis was performed for GEN-2017-047 to determine the capacitive charging effects during reduced generation conditions (unsuitable wind speeds, unsuitable solar irradiance, insufficient state of charge, idle conditions, curtailment, etc.) at the generation site and to size shunt reactors that would reduce the project reactive power contribution to the POI to approximately zero.

4.1 Methodology and Criteria

The GEN-2017-047 generators were switched out of service while other system elements remained in-service. A shunt reactor was tested at the project’s collection substation 34.5 kV bus to set the MVar flow into the POI to approximately zero. The size of the shunt reactor is equivalent to the charging current value at unity voltage and the compensation provided is proportional to the voltage effects on the charging current (i.e., for voltages above unity, reactive compensation is greater than the size of the reactor).

Aneden performed the reactive power analysis using the modification request data based on the 25SP DISIS-2018-002/2019-001 stability study model.

4.2 Results


The results from the analysis showed that the GEN-2017-047 project needed approximately 4 MVar of compensation at its collector substation to reduce the MVar injection at the POI to zero. This is an increase from the 1.67 MVar found in the DISIS-2017-001-2 study³. The final shunt reactor requirements are shown in Table 4-1. Figure 4-1 illustrates the shunt reactor size needed to reduce the POI MVar to approximately zero with the updated topology.

The information gathered from the reactive power analysis is provided as information to the Interconnection Customer and Transmission Owner (TO) and/or Transmission Operator (TOP). The applicable reactive power requirements will be further reviewed by the TO and/or TOP.

Table 4-1: Shunt Reactor Size for Reactive Power Analysis

Machine	POI Bus Number	POI Bus Name	Reactor Size (MVar)
			25SP
GEN-2017-047	523120	COLE 3	4.0

Figure 4-1: GEN-2017-047 Single Line Diagram (Shunt Sizes)

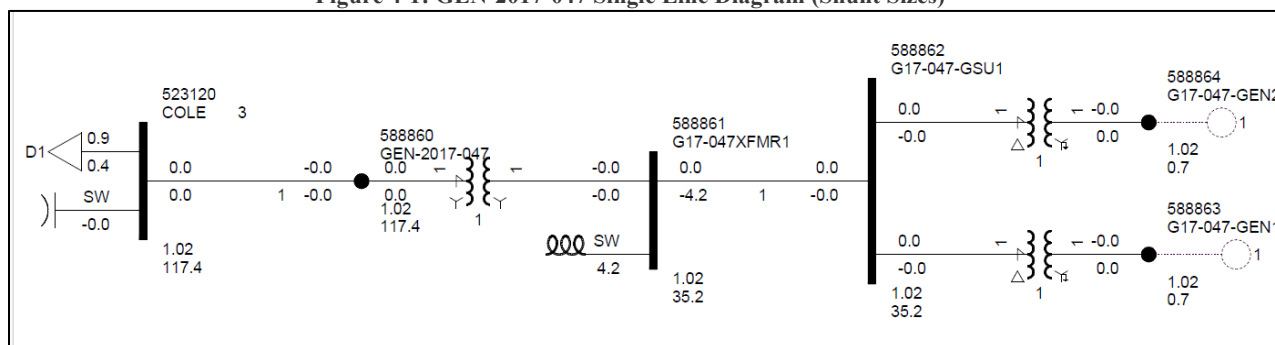

³ DISIS-2017-001-2 Restudy of Stability and Short Circuit Analysis – June 16, 2022

5.0 Short Circuit Analysis

Aneden performed a short circuit study using the 25SP model for GEN-2017-047 to determine the maximum fault current requiring interruption by protective equipment for each bus in the relevant subsystem. The detailed results of the short circuit analysis are provided in Appendix B.

5.1 Methodology

The short circuit analysis included applying a 3-phase fault on buses up to 5 levels away from the 115 kV POI bus. The PSS/E “Automatic Sequence Fault Calculation (ASCC)” fault analysis module was used to calculate the fault current levels in the transmission system with and without GEN-2017-047 online.

Aneden created a short circuit model using the 25SP DISIS-2018-002/2019-001 stability study model by adjusting the GEN-2017-047 short circuit parameters consistent with the submitted data. The adjusted parameters used in the short circuit analysis are shown in Table 5-1 below. No other changes were made to the model.

Table 5-1: Short Circuit Model Parameters*

Parameter	Value by Generator Bus#	
	588864	588863
Machine MVA Base	14	97.03
R (pu)	0.0	0.0
X'' (pu)	0.2	0.2

*pu values based on Machine MVA Base

5.2 Results

The results of the short circuit analysis for the 25SP model are summarized in Table 5-2 and Table 5-3. The GEN-2017-047 POI bus (Cole 115 kV) fault current magnitudes for the comparison cases are provided in Table 5-2 showing a fault current of 5.54 kA with the GEN-2017-047 project online. Table 5-3 shows the maximum fault current magnitudes and fault current increases with the GEN-2017-047 project online.

The maximum fault current calculated within 5 buses of the POI was 17.4 kA for the 25SP model. The maximum GEN-2017-047 contribution to three-phase fault currents was about 31.8% and 1.34 kA.

Table 5-2: POI Short Circuit Comparison Results

Case	GEN-OFF Current (kA)	GEN-ON Current (kA)	kA Change	%Change
25SP	4.20	5.54	1.34	31.8%

Table 5-3: 25SP Short Circuit Comparison Results

Voltage (kV)	Max. Current (kA)	Max kA Change	Max %Change
69	8.8	0.84	17.8%
115	17.4	1.34	31.8%
230	14.5	0.30	4.1%
345	14.6	0.16	1.1%
Max	17.4	1.34	31.8%

6.0 Dynamic Stability Analysis

Aneden performed a dynamic stability analysis to identify the impact of the modifications to GEN-2017-047. The analysis was performed according to SPP's Disturbance Performance Requirements⁴. The modification details are described in Section 2.0 above and the dynamic modeling data is provided in Appendix A. The existing base case issues and simulation plots can be found in Appendix C.

6.1 Methodology and Criteria

The dynamic stability analysis was performed using models developed with the requested GEN-2017-047 configuration of 31 x GE 2.82 MW + 5 x GE 2.52 MW (GEWTG0705) turbines. This stability analysis was performed using Siemens PTI's PSS/E version 34.8.0 software.

The modifications requested for the GEN-2017-047 project were used to create modified stability models for this impact study based on the DISIS-2018-002/2019-001 stability study models:

- 2025 Summer Peak (25SP),
- 2025 Winter Peak (25WP)

The dynamic model data for the GEN-2017-047 project is provided in Appendix A. The power flow models and associated dynamic database were initialized (no-fault test) to confirm that there were no errors in the initial conditions of the system and the dynamic data.

The following system adjustments were made to address existing base case issues that are not attributed to the modification request:

- The voltage protective relay at bus 763309 was disabled to avoid generator tripping due to an instantaneous over voltage spike after fault clearing.
- The PSSE dynamic simulation iterations and acceleration factor were adjusted as needed to resolve PSSE dynamic simulation crashes.
- The line impedance on bus 523120 to bus 522914 circuit Z was increased slightly for FLT9001-3PH and FLT9006-3PH to resolve dynamic simulation crashes.

During the fault simulations, the active power (PELEC), reactive power (QELEC), and terminal voltage (ETERM) were monitored for GEN-2017-047 and other current and prior queued projects in Group 5. In addition, voltages of five (5) buses away from the POI of the GEN-2017-047 were monitored and plotted. The machine rotor angle for synchronous machines and speed for asynchronous machines within the study areas 520 (AEPW), 524 (OKGE), 526 (SPS), 534 (SUNC), and 652 (WAPA) were monitored. The voltages of all 100 kV and above buses within the study area were monitored as well.

6.2 Fault Definitions

Aneden simulated the nearby faults previously studied in the DISIS-2018-002/2019-001 analysis and developed additional fault events as required. The new set of faults was simulated using the modified study models. The fault events included three-phase faults and single-line-to-ground stuck breaker faults. Single-line-to-ground faults are approximated by applying a fault impedance to bring the faulted bus positive sequence voltage to 0.6 pu. The simulated faults are listed and described in Table 6-1 below. These contingencies were applied to the modified 25SP and 25WP models.

⁴ SPP Disturbance Performance Requirements:

[https://www.spp.org/documents/28859/spp%20disturbance%20performance%20requirements%20\(twg%20approved\).pdf](https://www.spp.org/documents/28859/spp%20disturbance%20performance%20requirements%20(twg%20approved).pdf)

Table 6-1: Fault Definitions

Fault ID	Planning Event	Fault Description
FLT1000-SB	P4	Stuck Breaker on COLE 3 (523120) 115 kV Bus a. Apply single phase fault at the COLE 3 (523120) 115 kV Bus b. Clear fault after 16 cycles and trip the following elements: b.1. Trip bus COLE 3 (523120) 115 kV. Trip generator on the Bus G17-047-GEN1 (588863) 0.7 kV Trip generator on the Bus G17-047-GEN2 (588864) 0.7 kV
FLT1001-SB	P4	Stuck Breaker on COLE 2 (522918) 69 kV Bus a. Apply single phase fault at the COLE 2 (522918) 69 kV Bus b. Clear fault after 16 cycles and trip the following elements: b.1. Trip bus COLE 2 (522918) 69 kV.
FLT1002-SB	P4	Stuck Breaker on OCHILTREE 6 (523155) 230 kV Bus a. Apply single phase fault at the OCHILTREE 6 (523155) 230 kV Bus b. Clear fault after 16 cycles and trip the following elements: b.1. Trip bus OCHILTREE 6 (523155) 230 kV.
FLT1003-SB	P4	Stuck Breaker on OCHILTREE 3 (523154) 115 kV Bus a. Apply single phase fault at the OCHILTREE 3 (523154) 115 kV Bus b. Clear fault after 16 cycles and trip the following elements: b.1. Trip the OCHILTREE 3 (523154) 115 kV to PERRYTON 3 (523158) 115 kV line CKT 2. b.2. Trip the OCHILTREE 3 (523154) 115 kV to TXFARMS 3 (523140) 115 kV line CKT 1.
FLT1004-SB	P4	Stuck Breaker on OCHILTREE 3 (523154) 115 kV Bus a. Apply single phase fault at the OCHILTREE 3 (523154) 115 kV Bus b. Clear fault after 16 cycles and trip the following elements: b.1. Trip the OCHILTREE 3 (523154) 115 kV to PERRYTON 3 (523158) 115 kV line CKT 1. b.2. Trip the OCHILTREE 3 (523154) 115 kV to COLE 3 (523120) 115 kV line CKT 1.
FLT1005-SB	P4	Stuck Breaker on OCHILTREE 3 (523154) 115 kV Bus a. Apply single phase fault at the OCHILTREE 3 (523154) 115 kV Bus b. Clear fault after 16 cycles and trip the following elements: b.1. Trip the OCHILTREE 3 (523154) 115 kV to WADE_TP 3 (523145) 115 kV line CKT 1. b.2. Trip the OCHILTREE 3 (523154) 115 kV / OCHILTREE 6 (523155) 230 kV / OCHILTREE_TR11 (523151) 13.2 kV XFMR CKT 1.
FLT9000-3PH	P1	3 Phase fault on COLE 3 (523120) 115 kV to GEN-2017-047 (588860) 115 kV line CKT 1, near COLE 3 (523120) 115 kV. a. Apply fault at the COLE 3 (523120) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. Trip generator on the Bus G17-047-GEN1 (588863) 0.7 kV Trip generator on the Bus G17-047-GEN2 (588864) 0.7 kV c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9001-3PH	P1	3 Phase fault on COLE 3 (523120) 115 kV to BOYD 3 (522914) 115 kV line CKT Z, near COLE 3 (523120) 115 kV. a. Apply fault at the COLE 3 (523120) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9002-3PH	P1	3 Phase fault on COLE 3 (523120) 115 kV to TC-AGGIE 3 (523142) 115 kV line CKT 1, near COLE 3 (523120) 115 kV. a. Apply fault at the COLE 3 (523120) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.

Table 6-1 Continued

Fault ID	Planning Event	Fault Description
FLT9003-3PH	P1	3 Phase fault on COLE 3 (523120) 115 kV to OCHILTREE 3 (523154) 115 kV line CKT 1, near COLE 3 (523120) 115 kV. a. Apply fault at the COLE 3 (523120) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9004-3PH	P1	3 Phase fault on COLE 3 (523120) 115 kV to TC-ANTHY_TP3 (523012) 115 kV line CKT 1, near COLE 3 (523120) 115 kV. a. Apply fault at the COLE 3 (523120) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9005-3PH	P1	3 Phase fault on COLE 3 (523120) 115 kV / COLE 2 (522918) 69 kV / COLE-TER 2 (522958) 13.2 kV XFMR CKT 1, near COLE 3 (523120) 115 kV. a. Apply fault at the COLE 3 (523120) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted transformer.
FLT9006-3PH	P1	3 Phase fault on BOYD 3 (522914) 115 kV to COLE 3 (523120) 115 kV line CKT Z, near BOYD 3 (522914) 115 kV. a. Apply fault at the BOYD 3 (522914) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9007-3PH	P1	3 Phase fault on BOYD 3 (522914) 115 kV to LITTAU 3 (522942) 115 kV line CKT 1, near BOYD 3 (522914) 115 kV. a. Apply fault at the BOYD 3 (522914) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9008-3PH	P1	3 Phase fault on LITTAU 3 (522942) 115 kV to BOYD 3 (522914) 115 kV line CKT 1, near LITTAU 3 (522942) 115 kV. a. Apply fault at the LITTAU 3 (522942) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9009-3PH	P1	3 Phase fault on TC-AGGIE 3 (523142) 115 kV to COLE 3 (523120) 115 kV line CKT 1, near TC-AGGIE 3 (523142) 115 kV. a. Apply fault at the TC-AGGIE 3 (523142) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9010-3PH	P1	3 Phase fault on TC-AGGIE 3 (523142) 115 kV to TC-MCMURRY 3 (523113) 115 kV line CKT 1, near TC-AGGIE 3 (523142) 115 kV. a. Apply fault at the TC-AGGIE 3 (523142) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9011-3PH	P1	3 Phase fault on TC-MCMURRY 3 (523113) 115 kV to TC-AGGIE 3 (523142) 115 kV line CKT 1, near TC-MCMURRY 3 (523113) 115 kV. a. Apply fault at the TC-MCMURRY 3 (523113) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.

Table 6-1 Continued

Fault ID	Planning Event	Fault Description
FLT9012-3PH	P1	3 Phase fault on TC-MCMURRY 3 (523113) 115 kV to TEXAS_CNTY 3 (523090) 115 kV line CKT 1, near TC-MCMURRY 3 (523113) 115 kV. a. Apply fault at the TC-MCMURRY 3 (523113) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9013-3PH	P1	3 Phase fault on TC-ANTHY_TP3 (523012) 115 kV to COLE 3 (523120) 115 kV line CKT 1, near TC-ANTHY_TP3 (523012) 115 kV. a. Apply fault at the TC-ANTHY_TP3 (523012) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9014-3PH	P1	3 Phase fault on TC-ANTHY_TP3 (523012) 115 kV to ROSE 3 (522952) 115 kV line CKT 1, near TC-ANTHY_TP3 (523012) 115 kV. a. Apply fault at the TC-ANTHY_TP3 (523012) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9015-3PH	P1	3 Phase fault on TC-ANTHY_TP3 (523012) 115 kV to ANTHONY 3 (522899) 115 kV line CKT 1, near TC-ANTHY_TP3 (523012) 115 kV. a. Apply fault at the TC-ANTHY_TP3 (523012) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9016-3PH	P1	3 Phase fault on ROSE 3 (522952) 115 kV to TC-ANTHY_TP3 (523012) 115 kV line CKT 1, near ROSE 3 (522952) 115 kV. a. Apply fault at the ROSE 3 (522952) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9017-3PH	P1	3 Phase fault on ROSE 3 (522952) 115 kV to TC-BEAVER 3 (523024) 115 kV line CKT Z, near ROSE 3 (522952) 115 kV. a. Apply fault at the ROSE 3 (522952) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9018-3PH	P1	3 Phase fault on OCHILTREE 3 (523154) 115 kV to COLE 3 (523120) 115 kV line CKT 1, near OCHILTREE 3 (523154) 115 kV. a. Apply fault at the OCHILTREE 3 (523154) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9019-3PH	P1	3 Phase fault on OCHILTREE 3 (523154) 115 kV to TXFARMS 3 (523140) 115 kV line CKT 1, near OCHILTREE 3 (523154) 115 kV. a. Apply fault at the OCHILTREE 3 (523154) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9020-3PH	P1	3 Phase fault on OCHILTREE 3 (523154) 115 kV to WADE_TP 3 (523145) 115 kV line CKT 1, near OCHILTREE 3 (523154) 115 kV. a. Apply fault at the OCHILTREE 3 (523154) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.

Table 6-1 Continued

Fault ID	Planning Event	Fault Description
FLT9021-3PH	P1	3 Phase fault on OCHILTREE 3 (523154) 115 kV to PERRYTON 3 (523158) 115 kV line CKT 1, near OCHILTREE 3 (523154) 115 kV. a. Apply fault at the OCHILTREE 3 (523154) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9022-3PH	P1	3 Phase fault on OCHILTREE 3 (523154) 115 kV / OCHILTREE 6 (523155) 230 kV / OCHILTRE_TR11 (523151) 13.2 kV XFMR CKT 1, near OCHILTREE 3 (523154) 115 kV. a. Apply fault at the OCHILTREE 3 (523154) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted transformer.
FLT9023-3PH	P1	3 Phase fault on TXFARMS 3 (523140) 115 kV to OCHILTREE 3 (523154) 115 kV line CKT 1, near TXFARMS 3 (523140) 115 kV. a. Apply fault at the TXFARMS 3 (523140) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9024-3PH	P1	3 Phase fault on TXFARMS 3 (523140) 115 kV to SPEARMNSUB 3 (523203) 115 kV line CKT 1, near TXFARMS 3 (523140) 115 kV. a. Apply fault at the TXFARMS 3 (523140) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9025-3PH	P1	3 Phase fault on WADE_TP 3 (523145) 115 kV to OCHILTREE 3 (523154) 115 kV line CKT 1, near WADE_TP 3 (523145) 115 kV. a. Apply fault at the WADE_TP 3 (523145) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9026-3PH	P1	3 Phase fault on WADE_TP 3 (523145) 115 kV to WADE 3 (523147) 115 kV line CKT 1, near WADE_TP 3 (523145) 115 kV. a. Apply fault at the WADE_TP 3 (523145) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9027-3PH	P1	3 Phase fault on WADE_TP 3 (523145) 115 kV to LIPSCOMB 3 (523135) 115 kV line CKT 1, near WADE_TP 3 (523145) 115 kV. a. Apply fault at the WADE_TP 3 (523145) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9028-3PH	P1	3 Phase fault on PERRYTON 3 (523158) 115 kV to OCHILTREE 3 (523154) 115 kV line CKT 1, near PERRYTON 3 (523158) 115 kV. a. Apply fault at the PERRYTON 3 (523158) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9029-3PH	P1	3 Phase fault on PERRYTON 3 (523158) 115 kV / PERRYTON 2 (523157) 69 kV / PERRYTON 1 (523156) 8.7 kV XFMR CKT 1, near PERRYTON 3 (523158) 115 kV. a. Apply fault at the PERRYTON 3 (523158) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted transformer.
FLT9030-3PH	P1	3 Phase fault on OCHILTREE 6 (523155) 230 kV / OCHILTREE 3 (523154) 115 kV / OCHILTRE_TR11 (523151) 13.2 kV XFMR CKT 1, near OCHILTREE 6 (523155) 230 kV. a. Apply fault at the OCHILTREE 6 (523155) 230 kV Bus. b. Clear fault after 7 cycles by tripping the faulted transformer.
FLT9031-3PH	P1	3 Phase fault on OCHILTREE 6 (523155) 230 kV to HITCHLAND 6 (523095) 230 kV line CKT 1, near OCHILTREE 6 (523155) 230 kV. a. Apply fault at the OCHILTREE 6 (523155) 230 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.

Table 6-1 Continued

Fault ID	Planning Event	Fault Description
FLT9032-3PH	P1	3 Phase fault on HITCHLAND 6 (523095) 230 kV to OCHILTREE 6 (523155) 230 kV line CKT 1, near HITCHLAND 6 (523095) 230 kV. a. Apply fault at the HITCHLAND 6 (523095) 230 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9033-3PH	P1	3 Phase fault on HITCHLAND 6 (523095) 230 kV to MOORE_CNTY 6 (523309) 230 kV line CKT 1, near HITCHLAND 6 (523095) 230 kV. a. Apply fault at the HITCHLAND 6 (523095) 230 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9034-3PH	P1	3 Phase fault on HITCHLAND 6 (523095) 230 kV / HITCHLAND 7 (523097) 345 kV / HITCHLD_TR21 (523094) 13.2 kV XFMR CKT 2, near HITCHLAND 6 (523095) 230 kV. a. Apply fault at the HITCHLAND 6 (523095) 230 kV Bus. b. Clear fault after 7 cycles by tripping the faulted transformer.
FLT9035-3PH	P1	3 Phase fault on HITCHLAND 6 (523095) 230 kV / HITCHLAND 3 (523093) 115 kV / HITCHLD_TR11 (523092) 13.2 kV XFMR CKT 1, near HITCHLAND 6 (523095) 230 kV. a. Apply fault at the HITCHLAND 6 (523095) 230 kV Bus. b. Clear fault after 7 cycles by tripping the faulted transformer.
FLT9036-3PH	P1	3 Phase fault on HITCHLAND 3 (523093) 115 kV / HITCHLAND 6 (523095) 230 kV / HITCHLD_TR11 (523092) 13.2 kV XFMR CKT 1, near HITCHLAND 3 (523093) 115 kV. a. Apply fault at the HITCHLAND 3 (523093) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted transformer.
FLT9037-3PH	P1	3 Phase fault on HITCHLAND 3 (523093) 115 kV to FRISCO_WND 3 (523160) 115 kV line CKT 1, near HITCHLAND 3 (523093) 115 kV. a. Apply fault at the HITCHLAND 3 (523093) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9038-3PH	P1	3 Phase fault on HITCHLAND 3 (523093) 115 kV to HANSFORD 3 (523195) 115 kV line CKT 1, near HITCHLAND 3 (523093) 115 kV. a. Apply fault at the HITCHLAND 3 (523093) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9039-3PH	P1	3 Phase fault on HITCHLAND 3 (523093) 115 kV to GOODWELLWND3 (523174) 115 kV line CKT 1, near HITCHLAND 3 (523093) 115 kV. a. Apply fault at the HITCHLAND 3 (523093) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. Trip generator on the Bus GOODWELL_1 1 (523170) 0.7 kV Trip generator on the Bus GOODWELL_2 1 (523171) 0.7 kV c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9040-3PH	P1	3 Phase fault on HITCHLAND 3 (523093) 115 kV to TEXAS_CNTY 3 (523090) 115 kV line CKT 1, near HITCHLAND 3 (523093) 115 kV. a. Apply fault at the HITCHLAND 3 (523093) 115 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9041-3PH	P1	3 Phase fault on COLE 2 (522918) 69 kV / COLE 3 (523120) 115 kV / COLE-TER 2 (522958) 13.2 kV XFMR CKT 1, near COLE 2 (522918) 69 kV. a. Apply fault at the COLE 2 (522918) 69 kV Bus. b. Clear fault after 7 cycles by tripping the faulted transformer.

Table 6-1 Continued

Fault ID	Planning Event	Fault Description
FLT9042-3PH	P1	3 Phase fault on COLE 2 (522918) 69 kV to BALKO 2 (522911) 69 kV line CKT 1, near COLE 2 (522918) 69 kV. a. Apply fault at the COLE 2 (522918) 69 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9043-3PH	P1	3 Phase fault on COLE 2 (522918) 69 kV to TURPIN 2 (522923) 69 kV line CKT 1, near COLE 2 (522918) 69 kV. a. Apply fault at the COLE 2 (522918) 69 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9044-3PH	P1	3 Phase fault on COLE 2 (522918) 69 kV to HARDESTY 2 (522946) 69 kV line CKT 1, near COLE 2 (522918) 69 kV. a. Apply fault at the COLE 2 (522918) 69 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9045-3PH	P1	3 Phase fault on TURPIN 2 (522923) 69 kV to COLE 2 (522918) 69 kV line CKT 1, near TURPIN 2 (522923) 69 kV. a. Apply fault at the TURPIN 2 (522923) 69 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9046-3PH	P1	3 Phase fault on TURPIN 2 (522923) 69 kV to TURPIN-T 2 (522934) 69 kV line CKT 1, near TURPIN 2 (522923) 69 kV. a. Apply fault at the TURPIN 2 (522923) 69 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9047-3PH	P1	3 Phase fault on TURPIN-T 2 (522934) 69 kV to TURPIN 2 (522923) 69 kV line CKT 1, near TURPIN-T 2 (522934) 69 kV. a. Apply fault at the TURPIN-T 2 (522934) 69 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9048-3PH	P1	3 Phase fault on TURPIN-T 2 (522934) 69 kV to BEARD-T 2 (522898) 69 kV line CKT 1, near TURPIN-T 2 (522934) 69 kV. a. Apply fault at the TURPIN-T 2 (522934) 69 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9049-3PH	P1	3 Phase fault on TURPIN-T 2 (522934) 69 kV to PONDEROSA 2 (522953) 69 kV line CKT 1, near TURPIN-T 2 (522934) 69 kV. a. Apply fault at the TURPIN-T 2 (522934) 69 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9050-3PH	P1	3 Phase fault on BALKO 2 (522911) 69 kV to COLE 2 (522918) 69 kV line CKT 1, near BALKO 2 (522911) 69 kV. a. Apply fault at the BALKO 2 (522911) 69 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9051-3PH	P1	3 Phase fault on BALKO 2 (522911) 69 kV to HASKELL 2 (522947) 69 kV line CKT 1, near BALKO 2 (522911) 69 kV. a. Apply fault at the BALKO 2 (522911) 69 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.

Table 6-1 Continued

Fault ID	Planning Event	Fault Description
FLT9052-3PH	P1	3 Phase fault on HASKELL 2 (522947) 69 kV to BALKO 2 (522911) 69 kV line CKT 1, near HASKELL 2 (522947) 69 kV. a. Apply fault at the HASKELL 2 (522947) 69 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.
FLT9053-3PH	P1	3 Phase fault on HASKELL 2 (522947) 69 kV to ELMWOOD-T 2 (522916) 69 kV line CKT 1, near HASKELL 2 (522947) 69 kV. a. Apply fault at the HASKELL 2 (522947) 69 kV Bus. b. Clear fault after 7 cycles by tripping the faulted line. c. Wait 20 cycles, and then re-close the line in (b) back into the fault. d. Leave Fault on for 7 cycles, then trip the line in (b) and remove fault.

6.3 Results

Table 6-2 shows the relevant results of the fault events simulated for each of the modified models. Existing DISIS base case issues are documented separately in Appendix C. The associated stability plots are also provided in Appendix C.

Table 6-2: GEN-2017-047 Dynamic Stability Results

Fault ID	25SP			25WP		
	Voltage Violation	Voltage Recovery	Stable	Voltage Violation	Voltage Recovery	Stable
FLT1000-SB	Pass	Pass	Stable	Pass	Pass	Stable
FLT1001-SB	Pass	Pass	Stable	Pass	Pass	Stable
FLT1002-SB	Pass	Pass	Stable	Pass	Pass	Stable
FLT1003-SB	Pass	Pass	Stable	Pass	Pass	Stable
FLT1004-SB	Pass	Pass	Stable	Pass	Pass	Stable
FLT1005-SB	Pass	Pass	Stable	Pass	Pass	Stable
FLT9000-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9001-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9002-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9003-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9004-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9005-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9006-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9007-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9008-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9009-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9010-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9011-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9012-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9013-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9014-3PH	Pass	Pass	Stable	Pass	Pass	Stable

Table 6-2 continued

Fault ID	25SP			25WP		
	Voltage Violation	Voltage Recovery	Stable	Voltage Violation	Voltage Recovery	Stable
FLT9015-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9016-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9017-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9018-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9019-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9020-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9021-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9022-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9023-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9024-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9025-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9026-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9027-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9028-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9029-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9030-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9031-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9032-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9033-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9034-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9035-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9036-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9037-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9038-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9039-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9040-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9041-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9042-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9043-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9044-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9045-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9046-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9047-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9048-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9049-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9050-3PH	Pass	Pass	Stable	Pass	Pass	Stable

Table 6-2 continued

Fault ID	25SP			25WP		
	Voltage Violation	Voltage Recovery	Stable	Voltage Violation	Voltage Recovery	Stable
FLT9051-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9052-3PH	Pass	Pass	Stable	Pass	Pass	Stable
FLT9053-3PH	Pass	Pass	Stable	Pass	Pass	Stable

The results of the dynamic stability showed several existing base case issues that were found in both the original DISIS-2018-002/2019-001 model and the model with the GEN-2017-047 modification included. These issues were not attributed to the GEN-2017-047 modification request and detailed in Appendix C.

There were no damping or voltage recovery violations attributed to the GEN-2017-047 modification request observed during the simulated faults. Additionally, the project was found to stay connected during the contingencies that were studied and, therefore, will meet the Low Voltage Ride Through (LVRT) requirements of FERC Order #661A.

7.0 Material Modification Determination

In accordance with Attachment V of SPP's Open Access Transmission Tariff, for modifications other than those specifically permitted by Attachment V, SPP shall evaluate the proposed modifications prior to making them and inform the Interconnection Customer in writing of whether the modifications would constitute a Material Modification. Material Modification shall mean (1) modification to an Interconnection Request in the queue that has a material adverse impact on the cost or timing of any other Interconnection Request with a later Queue priority date; or (2) planned modification to an Existing Generating Facility that is undergoing evaluation for a Generating Facility Modification or Generating Facility Replacement, and has a material adverse impact on the Transmission System with respect to: i) steady-state thermal or voltage limits, ii) dynamic system stability and response, or iii) short-circuit capability limit; compared to the impacts of the Existing Generating Facility prior to the modification or replacement.

7.1 Results

SPP determined the requested modification is not a Material Modification based on the results of this Modification Request Impact Study performed by Aneden. Aneden evaluated the impact of the requested modification on the prior study results. Aneden determined that the requested modification did not negatively impact the prior study dynamic stability and short circuit results, and the modifications to the project were not significant enough to change the previously studied steady-state conclusions.

This determination implies that any network upgrades already required by GEN-2017-047 would not be negatively impacted and that no new upgrades are required due to the requested modification, thus not resulting in a material adverse impact on the cost or timing of any other Interconnection Request with a later Queue priority date.