



**INTERCONNECTION  
FACILITIES STUDY  
REPORT**

GEN-2015-073  
(IFS-2015-002-20)

Published March 2017

By SPP Generator Interconnections Dept.

## REVISION HISTORY

---

DATE OR VERSION NUMBER	AUTHOR	CHANGE DESCRIPTION	COMMENTS
3/08/2017	SPP	Initial draft report issued.	

DRAFT

# CONTENTS

---

Revision History.....	i
Summary.....	1
Introduction .....	1
Phase(s) of Interconnection Service .....	1
Credits/Compensation for Amounts Advanced for Network Upgrade(s).....	1
Interconnection Customer Interconnection Facilities .....	2
Transmission Owner Interconnection Facilities and Non-Shared Network Upgrade(s).....	3
Shared Network Upgrade(s) .....	4
Other Network Upgrade(s) .....	5
Conclusion.....	5
Appendices.....	6
A: Transmission Owner’s Interconnection Facilities Study Report.....	7

DRAFT

## SUMMARY

---

### *INTRODUCTION*

This Interconnection Facilities Study (IFS) for Interconnection Request GEN-2015-073/IFS-2015-002-20 is for a 200.10 MW generating facility located in Lyon County, Kansas. The Interconnection Request was studied in the DISIS-2015-002 Impact Study for Energy Resource Interconnection Service (ERIS) and Network Resource Interconnection Service (NRIS). The Interconnection Customer's requested in-service date is December 31, 2018.

The interconnecting Transmission Owner, Westar Energy, Inc. (WERE), performed a detailed IFS at the request of SPP. The full report is included in Appendix A. SPP has determined that full Interconnection Service will be available after the assigned Transmission Owner Interconnection Facilities and Non-Shared Network Upgrades are completed.

The primary objective of the IFS is to identify necessary Transmission Owner Interconnection Facilities, Network Upgrade(s), other direct assigned upgrade(s), and associated upgrade lead times needed to grant the requested Interconnection Service at the specified Point of Interconnection (POI).

### *PHASE(S) OF INTERCONNECTION SERVICE*

It is not expected that Interconnection Service will occur in phases. However, Interconnection Service will not be available until all Interconnection Facilities and Network Upgrade(s) can be placed in service.

### *CREDITS/COMPENSATION FOR AMOUNTS ADVANCED FOR NETWORK UPGRADE(S)*

Interconnection Customer shall be entitled to compensation in accordance with Attachment Z2 of the SPP OATT for the cost of SPP Network Upgrades, including any tax gross-up or any other tax-related payments associated with the Network Upgrades, that are not otherwise refunded to the Interconnection Customer. Compensation shall be in the form of either revenue credits or incremental Long Term Congestion Rights (iLTCR).

### ***INTERCONNECTION CUSTOMER INTERCONNECTION FACILITIES***

The Generating Facility is proposed to consist of eighty-seven (87) 2.3 MW Siemens wind generators for a total generating nameplate capacity of 200.10 MW.

The Interconnection Customer's Interconnection Facilities to be designed, procured, constructed, installed, maintained, and owned by the Interconnection Customer at its sole expense include:

- A 34.5kV collector system;
- Two (2) 345/34.5kV 72/96/200 MVA (ONAN/ONAF/ONAF) step-up transformer to be owned and maintained by the Interconnection Customer at the Interconnection Customer's substation;
- A four-and-a-half (4.5) mile overhead 345kV line to connect the Interconnection Customer's substation to the POI at the 345 kV bus at the existing WERE substation ("Emporia Energy Center") that is owned and maintained by WERE;
- All transmission facilities required to connect the Interconnection Customer's substation to the POI;
- Equipment at the Interconnection Customer's substation necessary to maintain a power factor at the POI between 95% lagging and 95% leading, including approximately 18.3Mvars<sup>1</sup> of reactors to compensate for injection of reactive power into the transmission system under no/reduced generating conditions. The Interconnection Customer may use wind turbine manufacturing options for providing reactive power under no/reduced generation conditions. The Interconnection Customer will be required to provide documentation and design specifications demonstrating how the requirements are met.

The Interconnection Customer shall coordinate relay, protection, control, and communication system configurations and schemes with the Transmission Owner.

---

<sup>1</sup> This approximate minimum reactor amount is needed for the current configuration of the wind farm as studied in the DISIS-2015-002 Impact Study.

**TRANSMISSION OWNER INTERCONNECTION FACILITIES AND NON-SHARED NETWORK UPGRADE(S)**

To facilitate interconnection, the interconnecting Transmission Owner will perform work as shown below necessary for the acceptance of the Interconnection Customer’s Interconnection Facilities.

**Table 1** lists the Interconnection Customer’s estimated cost responsibility for Transmission Owner Interconnection Facilities (TOIF) and Non-Shared Network Upgrade(s) and provides an estimated lead time for completion of construction. The estimated lead time begins when the Generator Interconnection Agreement has been fully executed.

*Table 1: Interconnection Customer TOIF and Non-Shared Network Upgrade(s)*

<b>TOIF and Non-Shared Network Upgrades Description</b>	<b>Allocated Cost Estimate (\$)</b>	<b>Allocated Percent (%)</b>	<b>Total Cost Estimate (\$)</b>	<b>Estimated Lead Time</b>
<b><u>WERE Emporia Energy Center Interconnection Substation: Transmission Owner Interconnection Facilities</u></b> Construct one (1) 345 kV line terminal, line switches, dead end structure, line relaying, communications, revenue metering, line arrestor and all associated equipment and facilities necessary to accept transmission line from Interconnection Customer’s Generating Facility.	\$600,000	100%	\$600,000	90 Weeks
<b><u>WERE Emporia Energy Center Interconnection Substation - Non-Shared Network Upgrades</u></b> Construct three (3) 345kV 3000 continuous ampacity breakers, control panels, line relaying, disconnect switches, structures, foundations, conductors, insulators, and all other associated work and materials. Allowance for Funds Used During Construction (AFUDC) and Contingency funds are included in this cost estimate.	\$1,976,628	100%	\$1,976,628	
<b>Total</b>	<b>\$2,576,628</b>	<b>100%</b>	<b>\$2,576,628</b>	


**SHARED NETWORK UPGRADE(S)**

The Interconnection Customer’s share of costs for Shared Network Upgrades is estimated in **Table 2** below.

*Table 2: Interconnection Customer Shared Network Upgrades*

Shared Network Upgrades Description	Allocated Cost Estimate (\$)	Allocated Percent (%)	Total Cost Estimate (\$)
<u>Currently none</u>	\$0	N/A	\$0
<b>Total</b>	<b>\$0</b>	<b>N/A</b>	<b>\$0</b>

All studies have been conducted assuming that higher-queued Interconnection Request(s) and the associated Network Upgrade(s) will be placed into service. If higher-queued Interconnection Request(s) withdraw from the queue, suspend or terminate service, the Interconnection Customer’s share of costs may be revised. Restudies, conducted at the customer’s expense, will determine the Interconnection Customer’s revised allocation of Shared Network Upgrades.

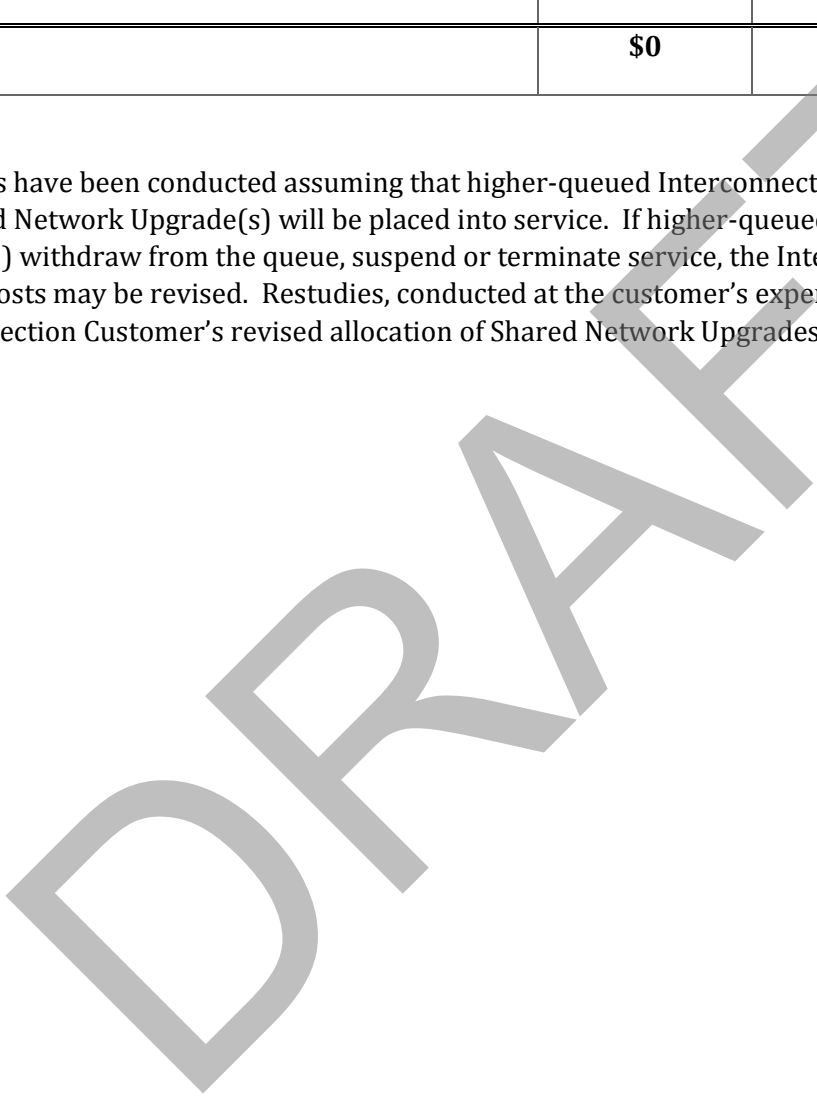

**OTHER NETWORK UPGRADE(S)**

Certain Other Network Upgrades are currently not the cost responsibility of the Interconnection Customer but will be required for full Interconnection Service.

- 1) Currently None

Depending upon the status of higher- or equally-queued customers, the Interconnection Request’s in-service date is at risk of being delayed or Interconnection Service is at risk of being reduced until the in-service date of these Other Network Upgrades.

**CONCLUSION**

After all Interconnection Facilities and Network Upgrades have been placed into service, Interconnection Service for 200.10 MW can be granted. Interconnection Service will be delayed until the Transmission Owner Interconnection Facilities and Non-Shared Network Upgrades are completed. The Interconnection Customer’s estimated cost responsibility for Transmission Owner Interconnection Facilities, Non-Shared Network Upgrades is summarized in the table below.

*Table 3: Cost Summary*

<b>Description</b>	<b>Allocated Cost Estimate</b>
Transmission Owner Interconnection Facilities	\$600,000
Network Upgrades	\$1,976,628
<b>Total</b>	<b>\$2,576,628</b>

A draft Generator Interconnection Agreement will be provided to the Interconnection Customer consistent with the final results of this IFS report. The Transmission Owner and Interconnection Customer will have 60 days to negotiate the terms of the GIA consistent with the SPP Open Access Transmission Tariff (OATT).



**APPENDICES**

---

DRAFT

# A: TRANSMISSION OWNER'S INTERCONNECTION FACILITIES STUDY REPORT

---

See next page for the Transmission Owner's Interconnection Facilities Study Report.

DRAFT



**Generation Interconnection Facility Study**

**For**

**Generation Interconnection Request  
SPP-GEN-2015-073**

**August 19, 2016**

## **Introduction**

This report summarizes the results of a Generation Interconnection Facilities Study performed for the Southwest Power Pool (SPP) by Westar Energy (WR) to evaluate a generation interconnection request for 200 MW of wind-powered generation to the point of interconnection at WR Emporia Energy Center 345 kV substation. A System Impact Study has been completed for this project. The requested in-service date of the generating facility is December 31, 2018.

## **Project Location and Existing Facilities**

The proposed interconnection will be at a new 345 kV line terminal at the Emporia Energy Center 345 kV substation.

Figure 1 shows the approximate location of the project. Figure 2 shows the preliminary one-line diagram of the new 345 kV line terminal.

## **DISIS Study Review**

WR has reviewed the steady-state, short-circuit, and dynamic study results for GEN-2015-073 included within SPP DISIS-2015-002-1 assessing the reliability impact of the proposed generation interconnection. WR agrees with the study approach and findings of the DISIS as posted by SPP. However, it should be noted that the 717 MVA terminal equipment limitations identified for Emporia Energy Center-Swissvale and Swissvale-West Gardner 345 kV lines has been increased to 956 MVA. The identified loading levels for the Group 8 Cluster analysis will not overload the facilities at the new rating.

## **Interconnection Facilities**

Interconnection to the WR transmission system will be by way of a new 345kV line terminal at the Emporia Energy Center 345 kV substation.

### **345 kV Substation Work**

The estimated cost includes one (1) 345 kV 3000 A breaker, two (2) 345 kV 3000 A switches, three (3) 3000 A stand alone CTs, three (3) 345 kV PTs, three (3) 345 kV control panels, and all associated site, yard, cable, grounding, and conduit work.

### **Transmission Line Work**

No transmission line work required

The total cost estimate for Transmission Owner Interconnection Facilities (Interconnection Metering) and Stand Alone Network Upgrades (345 kV Substation and Transmission Line Work) is:

\$ 2,003,689	<b>345 kV Substation Work</b>
\$ 134,326	<b>AFUDC</b>
<u>\$ 438,613</u>	<b>Contingency</b>
<b>\$ 2,576,628</b>	

This estimate is accurate to +/- twenty (20) percent, based on current prices, in accordance with Attachment A of Appendix 4 of the Interconnection Facilities Study Agreement. However, recent


cost fluctuations in materials are very significant and the accuracy of this estimate at the time of actual settings cannot be assured.

20 weeks	Engineering Time
40 weeks	Procurement Time
30 weeks	Construction Time
<b>90 weeks</b>	<b>Total</b>

Westar Energy also maintains its own Facility Connection Requirements, which may be found at (<http://www.oasis.oati.com/WR/index.html>).

DRAFT

**Figure 1 – Interconnection Map**

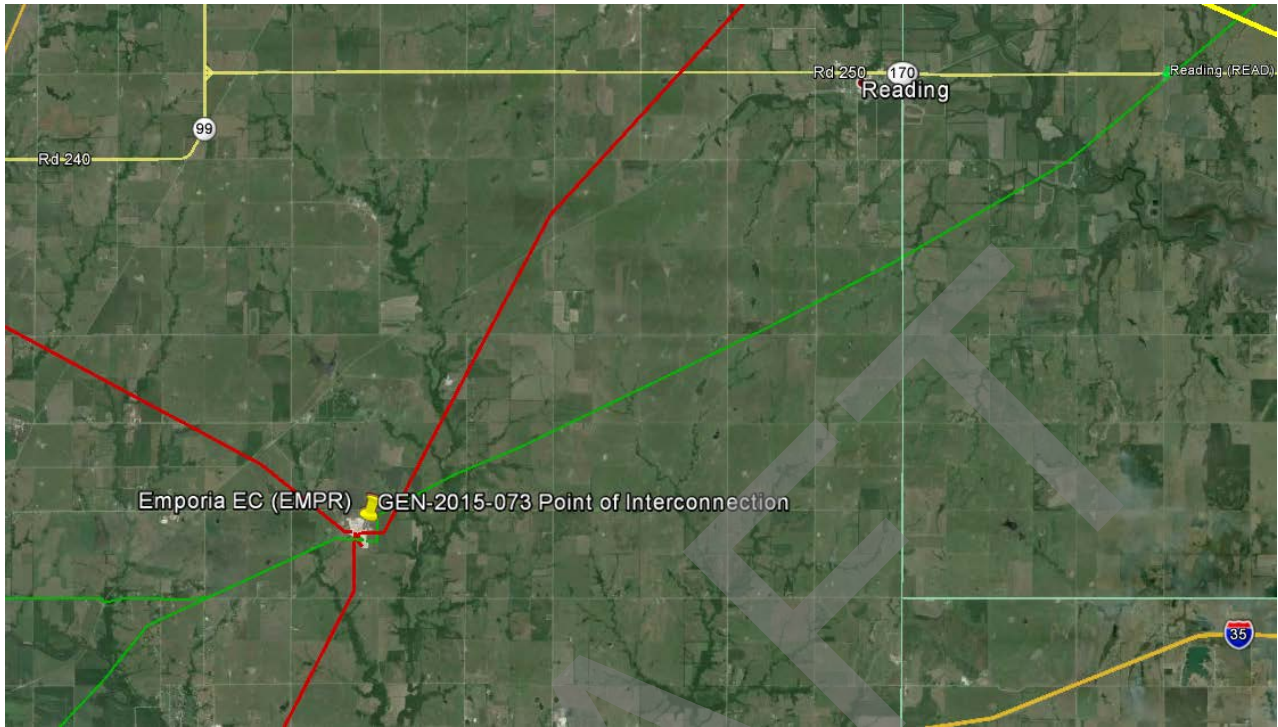

The proposed interconnection project is at the 345 kV Emporia Energy Center Substation



## Results of Short Circuit Analysis

As a part of this Facility Study, a short circuit study was performed to determine the available fault current at the interconnection bus (Emporia EC 345 kV bus 532768) using PSS/E's activity ASCC. The 2017 Summer Peak case from the 2016 Series MDWG Classical, Max Fault Short-Circuit models were used. All GEN-2015-073 Wind Farm generation was taken out of service for this analysis and all other transmission facilities are in service. As a result, the numbers generated represent the available utility interconnection fault current:

### **2017 Summer:**

3-PH FAULT		1-PH FAULT		THEVENIN IMPEDANCE (PU on 100 MVA and bus base KV)		
AMP	MVA	AMP	MVA	Positive Sequence	Negative Sequence	Zero Sequence
16658.04	9954.13	13847.37	8274.60	0.00068 +j 0.01002	0.00068 +j 0.01002	0.00840 +j 0.01487

DRAFT