

# INTERCONNECTION FACILITIES STUDY REPORT

GEN-2021-064

## **REVISION HISTORY**

DATE OR VERSION NUMBER	AUTHOR	CHANGE DESCRIPTION
September 4, 2025	SPP	Initial draft report issued.
September 18, 2025	SPP	Final report issued.

## CONTENTS

Re	visio	n History	i
		ry	
		duction	
ı	hase	e(s) of Interconnection Service	1
(	Comp	pensation for Amounts Advanced for Network Upgrade(s)	1
ı	ntero	connection Customer Interconnection Facilities	2
-	Γrans	mission Owner Interconnection Facilities and Non-Shared Network Upgrade(s)	3
9	Share	d Network Upgrade(s)	4
(	Conti	ngent Network Upgrade(s)	5
,	Affect	ted System Upgrade(s)	6
(	Concl	usion	7
Аp	pend	lices	8
,	۹: Tra	ansmission Owner's Interconnection Facilities Study Report and Network Upgrades Report(s)	9
-	L	Facilities Study Summary	11
-	l.1	Project Description	11
-	1.2	AEP's Scope of Work to Facilitate Interconnection	11
-	1.3	Short Circuit Evaluation	12
-	L.4	Stability Evaluation	12
-	1.5	Interconnection Cost of Facilities Included in the Facilities Study:	12
	l.6	Project Lead time	12

#### **SUMMARY**

#### INTRODUCTION

This Interconnection Facilities Study (IFS) for Interconnection Request GEN-2021-064 is for a 100 MW generating facility located in Caddo County, OK. The Interconnection Request was studied in the DISIS-2021-001 Impact Study for ERIS/NRIS. The Interconnection Customer's requested in-service date is 12/31/2027.

The interconnecting Transmission Owner, American Electric Power (AEP), performed a detailed IFS at the request of SPP. The full report is included in Appendix A. SPP has determined that full Interconnection Service will be available after the assigned Transmission Owner Interconnection Facilities (TOIF), Non-Shared Network Upgrades, Shared Network Upgrades, Contingent Network Upgrades, and Affected System Upgrades that are required for full interconnection service are completed.

The primary objective of the IFS is to identify necessary Transmission Owner Interconnection Facilities, Network Upgrades, other direct assigned upgrades, cost estimates, and associated upgrade lead times needed to grant the requested Interconnection Service.

#### PHASE(S) OF INTERCONNECTION SERVICE

It is not expected that Interconnection Service will occur in phases. However, full Interconnection Service will not be available until all Interconnection Facilities and Network Upgrade(s) can be placed in service.

#### COMPENSATION FOR AMOUNTS ADVANCED FOR NETWORK UPGRADE(S)

FERC Order ER20-1687-000 eliminated the use of Attachment Z2 revenue crediting as an option for compensation. The Incremental Long Term Congestion Right (ILTCR) process will be the sole process to compensate upgrade sponsors as of July 1st, 2020.

#### INTERCONNECTION CUSTOMER INTERCONNECTION FACILITIES

The Generating Facility is proposed to consist of fifty-three (53) 3.24 MW Sungrow SG3600UD inverters for a total generating nameplate capacity of 100 MW.

The Interconnection Customer's Interconnection Facilities to be designed, procured, constructed, installed, maintained, and owned by the Interconnection Customer at its sole expense include:

- 34.5 kV underground cable collection circuits;
- 34.5 kV to 138 kV transformation substation with associated 34.5 kV and 138 kV switchgear;
- One 138 kV/34.5 kV 90/120/150 MVA (ONAN/ONAF/ONAF) step-up transformer to be owned and maintained by the Interconnection Customer at the Interconnection Customer's substation;
- An Approximately 0.1 overhead 138 kV line to connect the Interconnection Customer's substation to the Point of Interconnection ("POI") at the 138 kV bus at existing Transmission Owner substation ("Carnegie South 138kV") that is owned and maintained by Transmission Owner;
- All transmission facilities required to connect the Interconnection Customer's substation to the POI;
- Equipment at the Interconnection Customer's substation necessary to maintain a composite power delivery at continuous rated power output at the high-side of the generator substation at a power factor within the range of 95% lagging and 95% leading in accordance with Federal Energy Regulatory Commission (FERC) Order 827. The Interconnection Customer may use inverter manufacturing options for providing reactive power under no/reduced generation conditions. The Interconnection Customer will be required to provide documentation and design specifications demonstrating how the requirements are met; and,
- All necessary relay, protection, control and communication systems required to protect Interconnection Customer's Interconnection Facilities and Generating Facilities and coordinate with Transmission Owner's relay, protection, control and communication systems.

## TRANSMISSION OWNER INTERCONNECTION FACILITIES AND NON-SHARED NETWORK UPGRADE(S)

To facilitate interconnection, the interconnecting Transmission Owner will perform work as shown below necessary for the acceptance of the Interconnection Customer's Interconnection Facilities.

**Table 1** and **Table 2** list the Interconnection Customer's estimated cost responsibility for Transmission Owner Interconnection Facilities (TOIF) and Non-Shared Network Upgrade(s) and provides an estimated lead time for completion of construction. The estimated lead time begins when the Generator Interconnection Agreement has been fully executed.

Table 1: Transmission Owner Interconnection Facilities (TOIF)

Transmission Owner Interconnection Facilities (TOIF)	Total Cost Estimate (\$)	Allocated Percent (%)	Allocated Cost Estimate (\$)
Transmission Owner's Carnegie South 138kV GEN-2021-064 Interconnection (TOIF) (UID 157027): Interconnection upgrades and cost estimates needed to interconnect the following Interconnection Customer facility, GEN-2021-064 (100/Solar, Battery/Storage), into the Point of Interconnection (POI) at Carnegie South 138kV. Estimated Lead Time: 36 Months	\$3,190,919	100.00%	\$3,190,919
Total	\$3,190,919		\$3,190,919

Table 2: Non-Shared Network Upgrade(s)

Non-Shared Network Upgrades Description	ILTCR	Total Cost Estimate (\$)	Allocated Percent (%)	Allocated Cost Estimate (\$)
Transmission Owner's Carnegie South 138kV GEN-2021-064 Interconnection (Non-shared NU) (UID 157028): Interconnection upgrades and cost estimates needed to interconnect the following Interconnection Customer facility, GEN-2021-064 (100/Solar, Battery/Storage), into the Point of Interconnection (POI) at Carnegie South 138kV. Estimated Lead Time: 36 Months	Ineligible	\$14,826,575	100.00%	\$14,826,575
Total		\$14,826,575		\$14,826,575

#### SHARED NETWORK UPGRADE(S)

The Interconnection Customer's share of costs for Shared Network Upgrades is estimated in **Table 3** below.

Table 3: Interconnection Customer Shared Network Upgrade(s)

Shared Network Upgrades Description	ILTCR	Total Cost Estimate (\$)	Allocated Percent (%)	Allocated Cost Estimate (\$)
<u>NA</u>				
Total		\$0		\$0

All studies have been conducted assuming that higher-queued Interconnection Request(s) and the associated Network Upgrade(s) will be placed into service. If higher-queued Interconnection Request(s) withdraw from the queue, suspend or terminate service, the Interconnection Customer's share of costs may be revised. Restudies, conducted at the customer's expense, will determine the Interconnection Customer's revised allocation of Shared Network Upgrades.

#### CONTINGENT NETWORK UPGRADE(S)

Certain Contingent Network Upgrades are **currently not the cost responsibility** of the Interconnection Customer but will be required for full Interconnection Service.

Table 4: Interconnection Customer Contingent Network Upgrade(s)

Contingent Network Upgrade(s) Description	Current Cost Assignment	Estimated In- Service Date
NA		

Depending upon the status of higher- or equally-queued customers, the Interconnection Request's inservice date is at risk of being delayed or Interconnection Service is at risk of being reduced until the inservice date of these Contingent Network Upgrades.

#### AFFECTED SYSTEM UPGRADE(S)

To facilitate interconnection, the Affected System Transmission Owner will be required to perform the facilities study work as shown below necessary for the acceptance of the Interconnection Customer's Interconnection Facilities. **Table 5** displays the current impact study costs provided by either MISO or AECI as part of the Affected System Impact review. The Affected System facilities study could provide revised costs and will provide each Interconnection Customer's allocation responsibilities for the upgrades.

Table 5: Interconnection Customer Affected System Upgrade(s)

Affected System Upgrades Description	Total Cost Estimate (\$)	Allocated Percent (%)	Allocated Cost Estimate (\$)
NA			
Total	\$0		\$0

#### **CONCLUSION**

After all Interconnection Facilities and Network Upgrades have been placed into service, Interconnection Service for 100 MW can be granted. Full Interconnection Service will be delayed until the TOIF, Non-Shared NU, Shared NU, Contingent NU, Affected System Upgrades that are required for full interconnection service are completed. The Interconnection Customer's estimated cost responsibility for full interconnection service is summarized in the table below.

Table 6: Cost Summary

Description	Allocated Cost Estimate
Transmission Owner Interconnection Facilities Upgrade(s)	\$3,190,919
Non-Shared Network Upgrade(s)	\$14,826,575
Shared Network Upgrade(s)	\$0
Affected System Upgrade(s)	\$0
Total	\$18,017,494

Use the following link for Quarterly Updates on upgrades from this report: <a href="https://spp.org/spp-documents-filings/?id=18641">https://spp.org/spp-documents-filings/?id=18641</a>

A draft Generator Interconnection Agreement will be provided to the Interconnection Customer consistent with the final results of this IFS report. The Transmission Owner and Interconnection Customer will have 60 days to negotiate the terms of the GIA consistent with the SPP Open Access Transmission Tariff (OATT).

## **APPENDICES**

# A: TRANSMISSION OWNER'S INTERCONNECTION FACILITIES STUDY REPORT AND NETWORK UPGRADES REPORT(S)

See next page for the Transmission Owner's Interconnection Facilities Study Report and Network Upgrades Report(s).



# AEP Generation Interconnection Facilities Study Report

for

**DISIS-2021-001** 

GEN-2021-064

Carnegie South 138 kV

Caddo County, Oklahoma

August 2025

#### 1 FACILITIES STUDY SUMMARY

American Electric Power Transmission Planning (AEP) performed the following study at the request of the Southwest Power Pool (SPP) for SPP Generation Interconnection request DISIS-2021-001; GEN-2021-064. Per the SPP Generator Interconnection Procedures (GIP), SPP requested that AEP perform an Interconnection Facilities Studies (IFS) for Network Upgrade(s) in accordance with Section 8.11 for the following Interconnection and/or Network Upgrade(s):

#### 1.1PROJECT DESCRIPTION

GEN-2021-064 proposes to connect a 100 MW solar/storage facility at the 138 kV Carnegie South AEP station (Figure 1) in Caddo County, Oklahoma (Figure 2).

#### 1.2AEP'S SCOPE OF WORK TO FACILITATE INTERCONNECTION

- To accommodate the interconnections, AEP's existing 138 kV Carnegie South station will have to be expanded to a 138 kV 4 breaker ring bus. Also, AEP will complete any needed remote work at the 138 kV Hobart Junction and Southwestern Station stations associated with this project. Bus work and disconnect switches will be designed to accommodate the loading requirements, and circuit breakers will be rated to ensure adequate load and fault interrupting capability. AEP will own, operate, and maintain the 138 kV Carnegie South station.
- Installation of associated protection and control equipment, SCADA, and revenue metering will be required at the AEP 138 kV Carnegie South station. AEP reserves the right to specify the final acceptable configuration considering design practices, future expansion, and compliance requirements.
- AEP will extend one span of 138 kV transmission line for the generation lead going to the 138 kV Carnegie South station. AEP will build and own the first transmission line structure outside of 138 kV Carnegie South station, to which AEP's transmission line conductor will attach. ROW will be required for this span.
- To accommodate the interconnection, work will need to be completed at the Interconnection Customer stations. Sub-metering will need to be installed at the customer station for this request.
- It is understood that the Interconnection Customer is responsible for all of the connection costs associated with interconnecting GEN-2021-064 to the AEP transmission system. The cost of the customer's generating facility and the costs for the line connecting the generating facility to AEP's transmission system (Beyond the

- first span exiting the POI station) are not included in this report; these are assumed to be the Customer's responsibility.
- The customer will be responsible for the cost of constructing a fiber-optic connection from their telecom equipment to AEP's 138 kV Carnegie South station.

#### 1.3SHORT CIRCUIT EVALUATION

- It is standard practice for AEP to recommend replacing a circuit breaker when the current through the breaker for a fault exceeds 100% of its interrupting rating with recloser de-rating applied, as determined by the ANSI/IEEE C37.5-1979, C37.010-1979 & C37.04-1979 breaker rating methods.
- In the AEP system, no breakers were found to exceed their interrupting capability after the addition of the generation and related facilities. Therefore, there are no additional short circuit upgrade costs associated with the DISIS-2021-001; GEN-2021-064 interconnection.

#### 1.4STABILITY EVALUATION

 Based on the results of the DISIS-2021-001 short circuit and stability report, AEP is not aware of any instances where the system does not meet TPL-001 stability performance requirements for the planning events and generation dispatch conditions that were considered in this DISIS study.

## 1.5INTERCONNECTION COST OF FACILITIES INCLUDED IN THE FACILITIES STUDY:

Network Upgrades (Expanded Carnegie South to a 138 kV 4	\$14,826,575
breaker ring bus for GEN-2021-064)	
Transmission Owner Interconnection Facilities (TOIF)	\$3,190,919
Total Cost	\$18,017,494

The estimates do not include the impact that delays in obtaining ROW, permits, or other approvals may have.

#### 1.6PROJECT LEAD TIME

Project in-service date is projected to be 36 months after the issuance of Authorization to Proceed from the Interconnection Customer.

To Hobart Junction

Carnegie South

S143M

Outside SUB

1302A

1302A

127/26/20 MH/A

New 4-Breaker ring bus conversion

Figure 1: Point of Interconnection (POI INFORMATION) One-Line Diagram

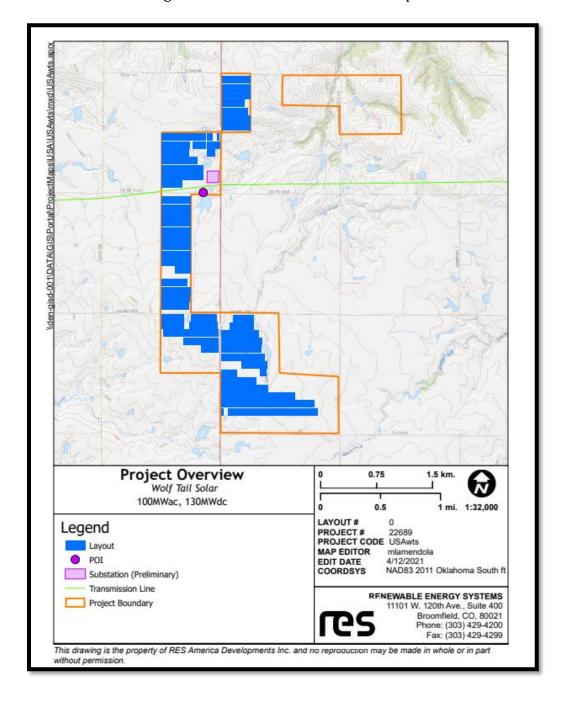


Figure 2: Point of Interconnection Maps