



# **INTERCONNECTION FACILITIES STUDY REPORT**

**GEN-2021-068**

Published November 2025

By SPP Generator Interconnections Dept.

## REVISION HISTORY

---

DATE OR VERSION NUMBER	AUTHOR	CHANGE DESCRIPTION
November 19, 2025	SPP	Initial draft report issued.
December 9, 2025	SPP	Final report issued.

## CONTENTS

---

Revision History.....	i
Summary.....	1
Introduction .....	1
Phase(s) of Interconnection Service .....	1
Compensation for Amounts Advanced for Network Upgrade(s).....	1
Interconnection Customer Interconnection Facilities .....	2
Transmission Owner Interconnection Facilities and Non-Shared Network Upgrade(s).....	3
Shared Network Upgrade(s) .....	4
Contingent Network Upgrade(s).....	6
Affected System Upgrade(s) .....	7
Conclusion.....	8
Appendices.....	9
A: Transmission Owner's Interconnection Facilities Study Report and Network Upgrades Report(s)...	10

## SUMMARY

---

### INTRODUCTION

This Interconnection Facilities Study (IFS) for Interconnection Request GEN-2021-068 is for a 249.6 MW generating facility located in Hodgeman and Ford Counties, KS. The Interconnection Request was studied in the DISIS-2021-001 Impact Study for ERIS. The Interconnection Customer's requested in-service date is 12/1/2027.

The interconnecting Transmission Owner, Sunflower Electric Power Corporation (SUNC), performed a detailed IFS at the request of SPP. The full report is included in Appendix A. SPP has determined that full Interconnection Service will be available after the assigned Transmission Owner Interconnection Facilities (TOIF), Non-Shared Network Upgrades, Shared Network Upgrades, Contingent Network Upgrades, and Affected System Upgrades that are required for full interconnection service are completed.

The primary objective of the IFS is to identify necessary Transmission Owner Interconnection Facilities, Network Upgrades, other direct assigned upgrades, cost estimates, and associated upgrade lead times needed to grant the requested Interconnection Service.

### PHASE(S) OF INTERCONNECTION SERVICE

It is not expected that Interconnection Service will occur in phases. However, full Interconnection Service will not be available until all Interconnection Facilities and Network Upgrade(s) can be placed in service.

### COMPENSATION FOR AMOUNTS ADVANCED FOR NETWORK UPGRADE(S)

FERC Order ER20-1687-000 eliminated the use of Attachment Z2 revenue crediting as an option for compensation. The Incremental Long Term Congestion Right (ILTCR) process will be the sole process to compensate upgrade sponsors as of July 1st, 2020.

## INTERCONNECTION CUSTOMER INTERCONNECTION FACILITIES

The Generating Facility is proposed to consist of fifty-two (52) 4.8 MW Nordex 4.8-149 inverters for a total generating nameplate capacity of 249.6 MW.

The Interconnection Customer's Interconnection Facilities to be designed, procured, constructed, installed, maintained, and owned by the Interconnection Customer at its sole expense include:

- 34.5 kV underground cable collection circuits;
- 34.5 kV to 345 kV transformation substation with associated 34.5 kV and 345 kV switchgear;
- One 345 kV/34.5 kV 168/224/280 MVA (ONAN/ONAF/ONAF) step-up transformer to be owned and maintained by the Interconnection Customer at the Interconnection Customer's substation;
- An approximately 3 mile overhead 345 kV line to connect the Interconnection Customer's substation to the Point of Interconnection ("POI") at the 345 kV bus at existing Transmission Owner substation ("SUNC Spearville - Holcomb 345kV") that is owned and maintained by Transmission Owner;
- All transmission facilities required to connect the Interconnection Customer's substation to the POI;
- Equipment at the Interconnection Customer's substation necessary to maintain a composite power delivery at continuous rated power output at the high-side of the generator substation at a power factor within the range of 95% lagging and 95% leading in accordance with Federal Energy Regulatory Commission (FERC) Order 827. The Interconnection Customer may use inverter manufacturing options for providing reactive power under no/reduced generation conditions. The Interconnection Customer will be required to provide documentation and design specifications demonstrating how the requirements are met; and,
- All necessary relay, protection, control and communication systems required to protect Interconnection Customer's Interconnection Facilities and Generating Facilities and coordinate with Transmission Owner's relay, protection, control and communication systems.

## TRANSMISSION OWNER INTERCONNECTION FACILITIES AND NON-SHARED NETWORK UPGRADE(S)

To facilitate interconnection, the interconnecting Transmission Owner will perform work as shown below necessary for the acceptance of the Interconnection Customer's Interconnection Facilities.

**Table 1** and **Table 2** list the Interconnection Customer's estimated cost responsibility for Transmission Owner Interconnection Facilities (TOIF) and Non-Shared Network Upgrade(s) and provides an estimated lead time for completion of construction. The estimated lead time begins when the Generator Interconnection Agreement has been fully executed.

*Table 1: Transmission Owner Interconnection Facilities (TOIF)*

Transmission Owner Interconnection Facilities (TOIF)	Total Cost Estimate (\$)	Allocated Percent (%)	Allocated Cost Estimate (\$)
<u>Transmission Owner's SEPC Spearville - Holcomb 345kV GEN-2021-068 Interconnection (TOIF) (UID 157067): Interconnection upgrades and cost estimates needed to interconnect the following IC facility, GEN-2021-068, into the Point of Interconnection (POI) at Spearville to Holcomb 345 kV Line. Estimated Lead Time: 60 Months</u>	\$5,238,900	24.88%	\$1,303,458
<b>Total</b>	<b>\$5,238,900</b>		<b>\$1,303,458</b>

*Table 2: Non-Shared Network Upgrade(s)*

Non-Shared Network Upgrades Description	ILTCR	Total Cost Estimate (\$)	Allocated Percent (%)	Allocated Cost Estimate (\$)
NA				
<b>Total</b>		<b>\$0</b>		<b>\$0</b>

## SHARED NETWORK UPGRADE(S)

The Interconnection Customer's share of costs for Shared Network Upgrades is estimated in **Table 3** below.

*Table 3: Interconnection Customer Shared Network Upgrade(s)*

Shared Network Upgrades Description	ILTCR	Total Cost Estimate (\$)	Allocated Percent (%)	Allocated Cost Estimate (\$)
<u>Transmission Owner's SEPC Spearville - Holcomb 345kV GEN-2021-068 / GEN-2021-069 -070 Interconnection Expansion (UID 157064): Interconnection upgrades and cost estimates needed to interconnect the following IC facility, GEN-2021-068, GEN-2021-069, GEN-2021-070 (249.6/Wind, 249.6/Wind, and 504/Wind), into the Point of Interconnection (POI) at Spearville to Holcomb 345 kV Line. Estimated Lead Time: 60 Months</u>	Ineligible	\$16,111,903	24.88%	\$4,008,703
<u>Evergy's Build a new 50 MVAR cap bank at Viola 138 kV (UID 170643): Build a new 50 MVAR cap bank at VIOLA 138 kV. Estimated Lead Time: 48 Months</u>	Eligible	\$1,270,333	4.96%	\$62,962
<u>SUNC's Build a new SPERVIL7 to G21-068-TAP 345 kV line 2 (UID 70665): Build a new 345kV line from SPERVIL7 to G21-068-TAP with an emergency rating of 1792 MVA. Estimated Lead Time: 60 Months</u>	Eligible	\$59,645,901	22.50%	\$13,422,442
<u>NPPD's Build a new AXTELL 345/115 kV Transformer 2 (UID 170653): Build a new AXTELL 345/115 kV Transformer 2 to a minimum rating of 336 MVA. Estimated Lead Time: 60 Months</u>	Eligible	\$26,200,000	19.26%	\$5,045,757
<u>NPPD &amp; ITCGP's Switch out Axtell to G16-050-TAP 345 kV line reactor at Axtell (50 MVAR) (170651, 170655): Switch out Axtell to G16-050-TAP 345 kV line reactor at Axtell (50 MVAR). Estimated Lead Time: 0 Months</u>	Ineligible	\$0	17.14%	\$0
<b>Total</b>		<b>\$103,228,137</b>		<b>\$22,539,864</b>

All studies have been conducted assuming that higher-queued Interconnection Request(s) and the associated Network Upgrade(s) will be placed into service. If higher-queued Interconnection Request(s) withdraw from the queue, suspend or terminate service, the Interconnection Customer's share of costs may be revised. Restudies, conducted at the customer's expense, will determine the Interconnection Customer's revised allocation of Shared Network Upgrades.

## CONTINGENT NETWORK UPGRADE(S)

Certain Contingent Network Upgrades are **currently not the cost responsibility** of the Interconnection Customer but will be required for full Interconnection Service.

*Table 4: Interconnection Customer Contingent Network Upgrade(s)*

Contingent Network Upgrade(s) Description	Current Cost Assignment	Estimated In-Service Date
NA		

Depending upon the status of higher- or equally-queued customers, the Interconnection Request's in-service date is at risk of being delayed or Interconnection Service is at risk of being reduced until the in-service date of these Contingent Network Upgrades.

## AFFECTED SYSTEM UPGRADE(S)

To facilitate interconnection, the Affected System Transmission Owner will be required to perform the facilities study work as shown below necessary for the acceptance of the Interconnection Customer's Interconnection Facilities. **Table 5** displays the current impact study costs provided by either MISO or AECI as part of the Affected System Impact review. The Affected System facilities study could provide revised costs and will provide each Interconnection Customer's allocation responsibilities for the upgrades.

*Table 5: Interconnection Customer Affected System Upgrade(s)*

Affected System Upgrades Description	Total Cost Estimate (\$)	Allocated Percent (%)	Allocated Cost Estimate (\$)
NA			
<b>Total</b>	<b>\$0</b>		<b>\$0</b>

## CONCLUSION

After all Interconnection Facilities and Network Upgrades have been placed into service, Interconnection Service for 249.6 MW can be granted. Full Interconnection Service will be delayed until the TOIF, Non-Shared NU, Shared NU, Contingent NU, Affected System Upgrades that are required for full interconnection service are completed. The Interconnection Customer's estimated cost responsibility for full interconnection service is summarized in the table below.

*Table 6: Cost Summary*

Description	Allocated Cost Estimate
Transmission Owner Interconnection Facilities Upgrade(s)	\$1,303,458
Non-Shared Network Upgrade(s)	\$0
Shared Network Upgrade(s)	\$22,539,864
Affected System Upgrade(s)	\$0
<b>Total</b>	<b>\$23,843,322</b>

Use the following link for Quarterly Updates on upgrades from this report: <https://spp.org/spp-documents-filings/?id=18641>

A draft Generator Interconnection Agreement will be provided to the Interconnection Customer consistent with the final results of this IFS report. The Transmission Owner and Interconnection Customer will have 60 days to negotiate the terms of the GIA consistent with the SPP Open Access Transmission Tariff (OATT).

## APPENDICES

---


Southwest Power Pool, Inc.

**A: TRANSMISSION OWNER'S INTERCONNECTION FACILITIES STUDY  
REPORT AND NETWORK UPGRADES REPORT(S)**

See next page for the Transmission Owner's Interconnection Facilities Study Report and Network Upgrades Report(s).



**Interconnection Facilities Study  
for DISIS-2021-001 Network Upgrade:  
GEN-2021-068, GEN-2021-069 & GEN-2021-070 Tap to  
Spearville 345 kV Transmission New Line Build**

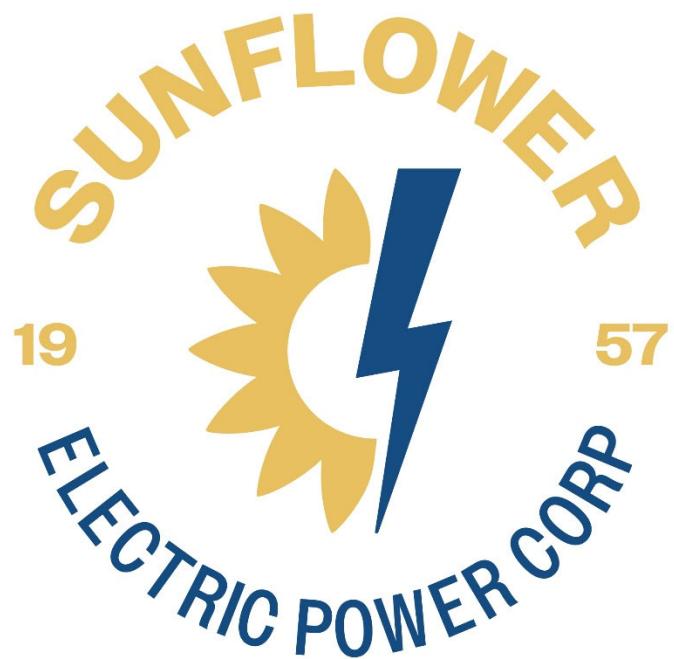

**August 11, 2025**

**Interconnection Facilities Study – GEN-2021-068, 069, & 070 Tap to Spearville  
New 345 kV Line Build**

**TABLE OF CONTENTS**

Study Overview: .....	2
Interconnection Facilities and Non-Shared Network Upgrades: .....	2
Interconnection Costs:.....	4
Project Timeline: .....	5

**Interconnection Facilities Study – GEN-2021-068, 069, & 070 Tap to Spearville  
New 345 kV Line Build**

## **STUDY OVERVIEW:**

The Southwest Power Pool has requested a Facility Study for a Network Upgrade from Sunflower Electric Power Corporation (Sunflower). The Network Upgrade identified includes a new 345 kV transmission line build from GEN-2021-068, GEN-2021-069 and GEN-2021-070 Tap Substation to Spearville Substation.

The cost of Sunflower's portion of building a new 345 kV transmission line from GEN-2021-068, GEN-2021-069 and GEN-2021-070 Tap Substation to Spearville Substation is estimated at \$54,116,411.

SPP's DISIS-2021-001 identified Network Upgrades included with this Facilities Study are associated with the following GEN's:

- GEN-2021-035
  - \$2,815,287
- GEN-2021-068
  - \$13,420,328
- GEN-2021-069
  - \$13,420,328
- GEN-2021-070
  - \$27,103,097

The purpose of this study is to provide estimated costs of facilities required for interconnection of the proposed generation to Sunflower's transmission system and to identify scope and estimated costs for network upgrades required on Sunflower's transmission system to allow the generation to run at the full requested capacity.

Additional network upgrades required for facilities of other transmission owners are not included in this study and will be identified by SPP.

## **INTERCONNECTION FACILITIES AND NON-SHARED NETWORK UPGRADES:**


There are no Transmission Owner Interconnection Facility (TOIF) upgrades or additions required by Sunflower currently identified.

Network Upgrades included in this study consist of building a new 345 kV transmission line from GEN-2021-068, GEN-2021-069 and GEN-2021-070 Tap Substation to Spearville Substation and terminal upgrades to the associated 345 kV substations to achieve the minimum 1792 MVA required by SPP. The new 345 kV transmission line shall be constructed and maintained by Sunflower.

The proposed arrangement for upgrades for GEN-2021-001 is shown in Figure 1.

**Interconnection Facilities Study – GEN-2021-068, 069, & 070 Tap to Spearville  
New 345 kV Line Build**

**Figure 1: One-line Diagram Facilities for DISIS-2021-001**

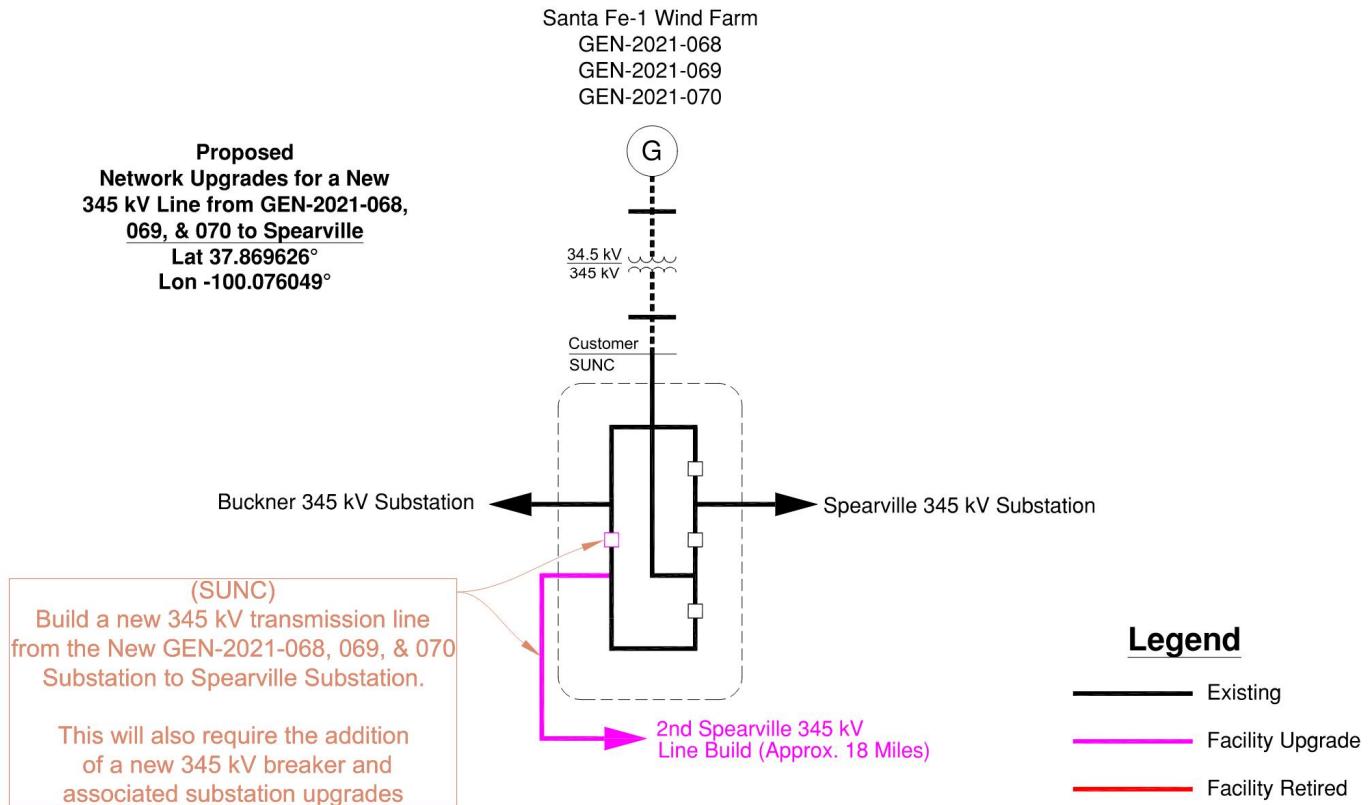

**Interconnection Facilities Study – GEN-2021-068, 069, & 070 Tap to Spearville  
New 345 kV Line Build**

## **INTERCONNECTION COSTS:**

Summary of interconnection costs for both Interconnection Facilities and Sunflower identified Network Upgrades can be found in the following table.

Facilities	Estimated Cost (2025 Dollars)
<b>Transmission Owner Interconnection Facilities (TOIF)</b> N/A	\$0
<b>Non-shared Network Upgrades</b> Build a new 345 kV transmission line from GEN-2021-068, GEN-2021-069 and GEN-2021-070 Tap Substation to Spearville Substation and terminal upgrades to the associated 345 kV substations to achieve the minimum 1792 MVA required for <b>GEN-2021-035</b> .	\$2,815,287
<b>Non-shared Network Upgrades</b> Build a new 345 kV transmission line from GEN-2021-068, GEN-2021-069 and GEN-2021-070 Tap Substation to Spearville Substation and terminal upgrades to the associated 345 kV substations to achieve the minimum 1792 MVA required for <b>GEN-2021-068</b> .	\$13,420,328
<b>Non-shared Network Upgrades</b> Build a new 345 kV transmission line from GEN-2021-068, GEN-2021-069 and GEN-2021-070 Tap Substation to Spearville Substation and terminal upgrades to the associated 345 kV substations to achieve the minimum 1792 MVA required for <b>GEN-2021-069</b> .	\$13,420,328
<b>Non-shared Network Upgrades</b> Build a new 345 kV transmission line from GEN-2021-068, GEN-2021-069 and GEN-2021-070 Tap Substation to Spearville Substation and terminal upgrades to the associated 345 kV substations to achieve the minimum 1792 MVA required for <b>GEN-2021-070</b> .	\$27,103,097

**Interconnection Facilities Study – GEN-2021-068, 069, & 070 Tap to Spearville  
New 345 kV Line Build**


<b>Non-shared Network Upgrades</b> Build a new 345 kV transmission line from GEN-2021-068, GEN-2021-069 and GEN-2021-070 Tap Substation to Spearville Substation and terminal upgrades to the associated 345 kV substations to achieve the minimum 1792 MVA required for <b>unknown associated GEN(s)</b> .	\$2,886,861
<b>Total Interconnection Cost:</b>	\$59,645,901

## **PROJECT TIMELINE:**

Specific construction schedule and milestones will be determined during the Generator Interconnection Agreement negotiations. Sunflower is estimating an engineering and construction schedule for this project as approximately 60 months. Other factors associated with clearances; equipment procurement delays and work schedules could cause additional delays. This is applicable after all required agreements are signed and internal approvals are granted.



**Interconnection Facilities Study  
for GEN-2021-068, GEN-2021-068 & GEN-2021-070 Network  
Upgrades and TOIF upgrades on the Spearville to  
Holcomb (Buckner) 345 kV Transmission Line**

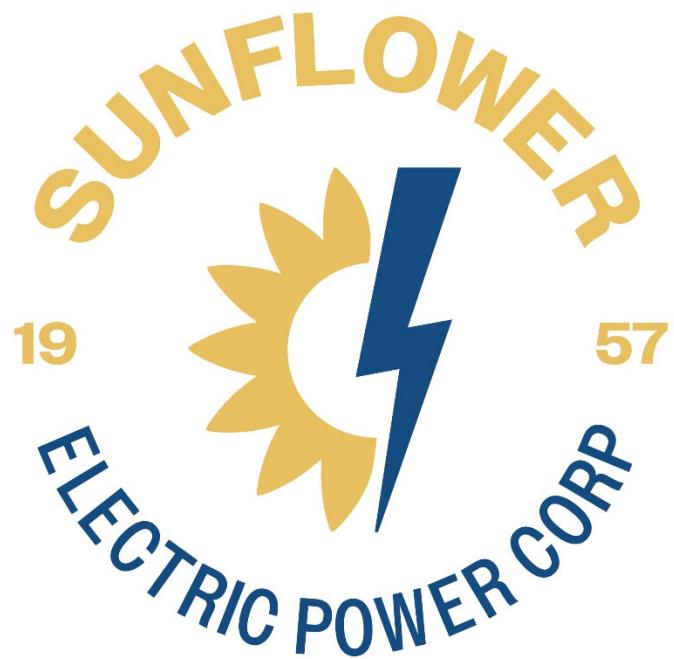

August 11, 2025

***Interconnection Facilities Study – Spearville to Holcomb (Buckner) 345 kV  
Transmission Line Network Upgrades and TOIF***

**TABLE OF CONTENTS**

Study Overview: .....	2
Interconnection Facilities and Non-Shared Network Upgrades: .....	2
Interconnection Costs:.....	4
Project Timeline: .....	4

## **Interconnection Facilities Study – Spearville to Holcomb (Buckner) 345 kV Transmission Line Network Upgrades and TOIF**

### **STUDY OVERVIEW:**

The Southwest Power Pool has requested a Facility Study for Interconnection Facilities and Network Upgrades from Sunflower Electric Power Corporation (Sunflower) on the Spearville to Buckner 345 kV Transmission Line for request GEN-2021-068, GEN-2021-069 and GEN-2021-070. The GEN-2021-068, GEN-2021-069 and GEN-2021-070 request consists of a total of 1003.2 MW of wind generation interconnecting on the Spearville to Buckner 345 kV Transmission Line.

The Non-Shared Network Upgrades (NU) identified to accept a new generator lead includes terminal equipment to accept a new line on the existing Spearville to Buckner 345 kV Transmission Line. The cost for these Network Upgrades is estimated at \$40,864,891.

The Transmission Owner Interconnection Facility (TOIF) addition identified is a new 345 kV generator lead connection on the existing Spearville to Buckner 345 kV Transmission Line. The cost for adding the new 345 kV generator lead is estimated at \$5,238,900.

The purpose of this study is to provide estimated costs of facilities required for interconnection of the proposed generation to Sunflower's transmission system and to identify scope and estimated costs for network upgrades required on Sunflower's transmission system to allow the generation to run at the full requested capacity.

Additional network upgrades required for facilities of other transmission owners are not included in this study and will be identified by SPP.

### **INTERCONNECTION FACILITIES AND NON-SHARED NETWORK UPGRADES:**

Non-shared Network Upgrades (NU) additions required by Sunflower consist of the addition of a new 345 kV Substation (ring bus configuration) with circuit breakers, CCVTs, disconnect switches, structures, foundations, conductors, insulators, and all other associated work and materials. It was also identified that OPGW will be needed from Spearville to Buckner for protection requirements. OPGW costs have been included for procurement and construction at a high level. No structure analysis or costs associated with structure modifications have been completed at this time.

Transmission Owner Interconnection Facility (TOIF) additions required by Sunflower consist of revenue metering CTs and PTs, disconnect switch, protective relays, and terminal equipment needed to interconnect the customer's generator lead line to Sunflower's new 345 kV Substation.


This 345 kV Substation addition on the Spearville to Buckner 345 kV Transmission Line shall be constructed and maintained by Sunflower. It is assumed that obtaining all necessary right-of-way for the line into the Sunflower 345 kV substation facilities will be performed by the interconnection customer. The addition of the generator 345 kV lead line from the customer substation into the new Sunflower 345 kV substation and the

## Interconnection Facilities Study – Spearville to Holcomb (Buckner) 345 kV Transmission Line Network Upgrades and TOIF

step up transformer that connects to the customer's collector substation is not included and is the responsibility of the interconnection customer.

The proposed arrangement for interconnection of GEN-2021-068, GEN-2021-069 and GEN-2021-070 is shown in Figure 1.

**Figure 1: One-line Diagram Facilities for GEN-2021-068, GEN-2021-069 and GEN-2021-070**

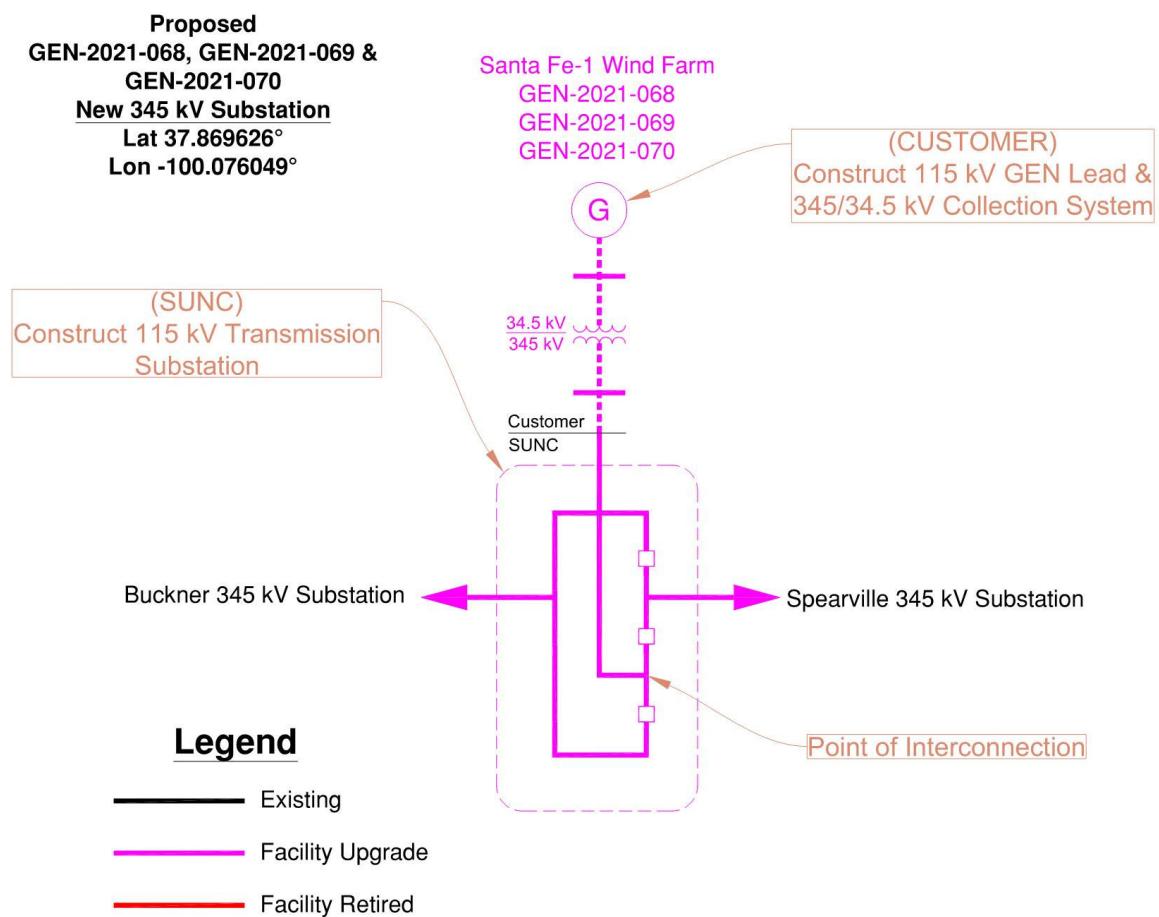

**Interconnection Facilities Study – Spearville to Holcomb (Buckner) 345 kV  
Transmission Line Network Upgrades and TOIF**

## **INTERCONNECTION COSTS:**

Summary of interconnection costs for both Interconnection Facilities and Sunflower identified Network Upgrades can be found in the following table. The cost increase from Phase 2 to Facility Study is due to moving the POI out of Buckner Substation (existing substation expansion) to a new POI on the Buckner to Spearville Line (new substation).

Facilities	Estimated Cost (2025 Dollars)
<b>Transmission Owner Interconnection Facilities (TOIF)</b> Construct one (1) line terminal addition in the new 345 kV substation with revenue metering CTs and PTs, disconnect switch, protective relays, and terminal equipment needed to interconnect the customer's generator lead line.	\$5,238,900
<b>Non-shared Network Upgrades</b> Construct the addition of a new 345 kV Substation (ring bus configuration) with circuit breakers, CCVTs, disconnect switches, structures, foundations, conductors, insulators, and all other associated work and materials.	\$40,864,891
<b>Total Interconnection Cost:</b>	\$46,103,791

## **PROJECT TIMELINE:**

Specific construction schedule and milestones will be determined during the Generator Interconnection Agreement negotiations. Sunflower is estimating an engineering and construction schedule for this project as approximately 60 months. Other factors associated with clearances, equipment procurement delays and work schedules could cause additional delays. This is applicable after all required agreements are signed and internal approvals are granted.

**NPPD  
DISIS-2021-001  
FACILITY STUDY**

**NOVEMBER 2025**

**PREPARED FOR:  
SOUTHWEST POWER POOL**

**PREPARED BY:  
NEBRASKA PUBLIC POWER DISTRICT  
ENERGY DELIVERY  
TRANSMISSION ASSET PLANNING  
ENGINEERING & ASSET MANAGEMENT**



**Nebraska Public Power District**  
*"Always there when you need us"*



The *NPPD DISIS-2021-001 Facility Study* was performed to document the interconnection facilities and network upgrades identified by SPP in Phase 2 of the SPP DISIS-2021-001 Study. NPPD also reviewed the proposed interconnection facilities and network upgrades and associated generation interconnection request impacts on the Short Circuit capability of the NPPD system. The NPPD Facility Study includes detailed cost estimates and estimated project schedules for the upgrades identified in the SPP studies.

### **Interconnection Facility Upgrades**

NPPD's Engineering, Asset Management, and Project Management groups have reviewed the interconnection facility upgrades that are required for SPP DISIS-2021-001 Generation Interconnection projects. Detailed cost estimates have been prepared for the facility upgrades that were identified in the system impact study for the requests. The prepared cost estimates are study level estimates (+20%/-20%) and assume implementation of standard NPPD construction and procurement practices. The cost estimates for the interconnection facilities are below:

- Olive Creek 115 kV Substation
    - GEN-2020-027
      - 102 MW Solar
    - Expand Olive Creek 115 kV substation.
    - 36 Month Lead Time
- \$ 1,300,000**
- 
- Antelope 345 kV Substation
    - GEN-2021-057
      - 300 MW Wind
    - Expand Antelope 345 kV Substation.
    - 60 Month Lead Time
- \$ 16,300,000**

Preliminary one-line diagrams for each generation interconnection project are in Appendix 2.

## **Generator Interconnection Reactive Compensation Requirements (MVAR)**

The SPP DISIS-2021-001 Phase 2 study documented the GI customer reactive compensation requirements for each POI. The following reactive compensation requirements should be included in the generation interconnection agreement as GI customer reactive power requirements to ensure the reliability of the SPP transmission system is maintained following the proposed GI projects.

Gen Number	Fuel Type	MW Amount	Reactive Compensation Requirement (MVAR)	POI
GEN-2020-027	Solar	102	-0.6	Olive Creek 115 kV Substation
GEN-2020-057	Wind	300	-29.9	Antelope 345 kV Substation

## **Network Upgrades**

NPPD's Engineering, Asset Management, and Project Management groups have reviewed the network upgrades that are required for SPP DISIS-2021-001 Generation Interconnection projects. Detailed cost estimates have been prepared for the facility upgrades that were identified in the system impact study for the requests. The prepared cost estimates are study level estimates (+20%/-20%) and assume implementation of standard NPPD construction and procurement practices. The cost estimates for the network upgrades are below:

- Second Antelope 345/115 kV transformer
    - Install second 345/115 kV transformer at Antelope 345/115 kV substation including terminal upgrades.
    - At least 417 MVA
    - 60 Month Lead Time
- \$ 26,200,000**
- Second Axtell 345/115 kV transformer
    - Install second 345/115 kV transformer at Axtell 345/115 kV substation including terminal upgrades.
    - At least 417 MVA
    - 60 Month Lead Time
- \$ 26,200,000**

- Axtell – Kearney 115 kV Line Rebuild
    - Rebuild existing Axtell – Kearney 115 kV Line
    - At least 400 MVA (rebuild)
    - 60 Month Lead Time
- \$ 15,600,000**

Network Upgrade project schedule details will be further discussed in the development of the generator interconnection agreements (GIA) and the milestones associated with the generation interconnection projects.

### **Contingent Upgrades**

The results of DISIS-2021-001 documented that several Generation Interconnection requests are contingent on the completion of the following previously allocated required network upgrades:

- Gentleman – Thedford - Holt County (R-Project) and Thedford 345/115 kV Transformer project (2012 ITP10/HPILS)

If the generation interconnection projects proceed to the generation interconnection agreement, then an operating study may need to be performed to fully assess and evaluate the operation of the generation facility and network upgrades in accordance with NERC Standards. The operating study requirement will be included in the generation interconnection agreement with NPPD. If any generation interconnection projects are identified to have significant impact on the GGS Stability Interface (Flowgate #6006) and LRS/DC stability limitations in western NE, then the operating study will need to take these issues into account. The operating study may also need to evaluate the reactive power control requirements and associated equipment necessary to meet operational voltage requirements at the requested point of interconnection.

## **Short Circuit Study**

NPPD's Engineering group has reviewed the short circuit impacts of the SPP DISIS-2021-001 Generation Interconnection projects and associated network upgrades interconnected to the NPPD transmission system. The result of this study is documented in Appendix 1. The short circuit study identified three breakers at the NPPD Axtell 115 kV substation that needs replaced (Axtell 115 – 1102, 1104, 1108). The details of these breaker replacements are listed below. This breaker replacement network upgrade project should be included in the Generation Interconnection agreements associated with the DISIS-2021-001.

- Replace Axtell 115 kV breakers
  - Replace Axtell 115 kV breaker 1102, 1104 and 1108 with higher interrupting rating breaker.
  - At least 40 KA
  - 36 Month Lead Time

**\$ 2,000,000**

## **Appendix 1**

**NPPD Short Circuit Study Report**

**DISIS-2021-001**



# Short Circuit Study

## Model Development

### Computer Programs

The Aspen OneLiner software program was utilized to perform short circuit simulations and studies on the transmission system. Where elements were added to the short-circuit model, best estimates for impedance parameters were used based on available data and typical modeling practices. Short-circuit calculation options used were as follows:

- Flat voltage profile with  $V(\text{pu}) = 1.0$
- Generator Impedance = Subtransient
- Ignore loads, transmission line  $G+jB$ , and shunts with positive sequence values

OneLiner was used to calculate three-phase (3PH) and single-line-to-ground (SLG) system-intact bus fault currents for all system buses associated with interrupting devices being evaluated in this study. For devices that the full bus fault current approached or exceeded the device's interrupting rating, more detailed fault calculations were done, calculating the maximum phase current through the breaker for close-in faults, close-in faults with the remote end open, and bus faults with all other branches to the bus open. The maximum phase current of these faults was recorded. For comparison with the breaker interrupting ratings, maximum phase current was multiplied by a factor of 1.05 to account for the possibility of the system operating at up to the maximum normal operating voltage of 1.05 per-unit.

### Base System Model Additions (“Base Case”)

The base system model used by the transmission system protection department as of October 27, 2025 was used as the starting point for the short-circuit model used for this study. The base system model included all projects that were in-service at the time the model was copied. All Nebraska-area generation in the short-circuit model was enabled in order to provide maximum short-circuit current. For the study base case, planned system upgrades in the area of the studied projects and prior-queued large generator interconnections expected to be in-service prior to the projects being studied were added to the base case model. Table 1 lists the prior-queued large generator interconnections that were added to the base model for this study.

**Table 1: Prior Queued Large Generator Interconnections**

<b>Queue Designation</b>	<b>Proposed POI</b>	<b>Capacity (MW)</b>
GEN-2013-002	Hallam 115kV / Panama WF to Olive Creek	50.6
GEN-2013-019	Hallam 115kV / Panama WF to Olive Creek	73.6
GEN-2016-074	Sweetwater 345kV (Expand substation)	200
GEN-2017-144	Holt County 345kV Substation (Expand substation)	200
GEN-2017-181	Tobias 345kV Substation (Expand substation)	300
GEN-2017-182	Tobias 345kV Substation (Expand substation)	128
GEN-2017-201	Turtle Creek 345kV connect at Sholes WF	250
GEN-2017-234	Greeley 115kV Substation (New substation)	115
GEN-2018-060	Macon 345kV (Expand substation)	50
GEN-2018-125	Etna 345kV (New substation)	231
GEN-2018-131	Pierce County 115kV (New substation)	221.4
GEN-2018-132	Pierce County 115kV (New substation)	201.6
GEN-2019-039	Butler County 115kV (New substation)	174.5
GEN-2019-041	Olive Creek 115kV (Expand substation)	78
GEN-2020-011	Axtell 345kV Substation (Expand substation)	320
GEN-2020-013	Orleans 115kV Substation (Expand substation)	215
GEN-2020-069	Kilgore 115kV Substation (New substation)	52.85

In addition to the prior-queued large generator interconnections, planned system upgrades in the area of the studied projects were added to the base model. These include:

- The planned 345kV line from GGS – Thedford – Holt County “RPLAN” was included with a 345kV/115kV tie transformer at Thedford 115 kV
- New 345kV line from Antelope to Holt County
- New Olive Creek sub addition near Mark Moore/Sheldon
- Upgrade of the Columbus East T3 to 336MVA
- Stanton North expansion for a new 100MVA load-serving transformer, future 115kV line Stanton North to Norfolk, Hoskins T1 replaced with a 336MVA
- Upgrade of Mark Moore T1 replacement with a 417MVA
- Rebuild of L1153B Columbus SE to new collector sub for G19-39-TAP (Butler County) to Rising City
- Rebuild of L1132 Holdrege-Orleans to new collector sub for G20-13 at/near Orleans

## Model Additions for Projects Being Studied (“Study Case”)

The base-case study model was modified to include the new generation interconnections being considered in this study as well as the system upgrades identified to accommodate this additional generation. Table 2 lists the large generator interconnections that were added to the study-case model for this study.

**Table 2: Large Generator Interconnections Added to Study Case**

Queue Designation	Proposed POI	Capacity (MW)
GEN-2021-027	Olive Creek 115kV Substation (Expand substation)	102
GEN-2021-057	Antelope 345kV Substation (Expand substation)	300

In addition to the DISIS-2021-001 generator interconnections, network system upgrades in the area of the studied projects were added to the base model. These include:

- Addition at Antelope of a 345kV/115kV transformer at 417MVA
- Addition at Axtell of a 345kV/115kV transformer at 417MVA
- Rebuild of L1067 Axtell-Kearney.

## Study Methodology

Circuit breaker, circuit switcher, and fuse ratings were identified by querying NPPD’s SAP equipment database and extracting equipment data including short-circuit ratings. Breaker ratings given on an asymmetrical (total current) basis were converted to symmetrical current ratings using an assumed maximum system operating voltage of 1.05 per unit.

The calculated short-circuit current at the equipment bus was extracted from the short-circuit results from Aspen OneLiner and compared against the interrupting device interrupting rating. It is recommended that all equipment be replaced if it is found to be at or above 95% of its interrupting rating and seeing an increase of 1% or more in its interrupting duty as a result of the studied projects.

## Results

The following devices were found to be above 95% of their interrupting rating due to the addition of the projects considered in this study and are recommended for replacement.


Location – Breaker	Manuf.	Model Number	Interrupting Rating	Max Expected Interrupting (A)	Max Current (% of Rating)	Relative Change (%)
Axtell 345 – 1102	WESTING HOUSE	1150-GM-5000	19367	25345	130.9%	45.0%
Axtell 345 – 1104	ITE IMPERIAL COMPANY	115-KM-5000-12B	19089	25345	132.8%	45.0%
Axtell 345 – 1108	ALLIS CHALMERS	BZO-121-20-7	20000	25345	126.7%	45.0%

## **Appendix 2**


### **Generation Interconnection Facilities One-Line Diagrams**



## Olive Creek 115 kV Substation

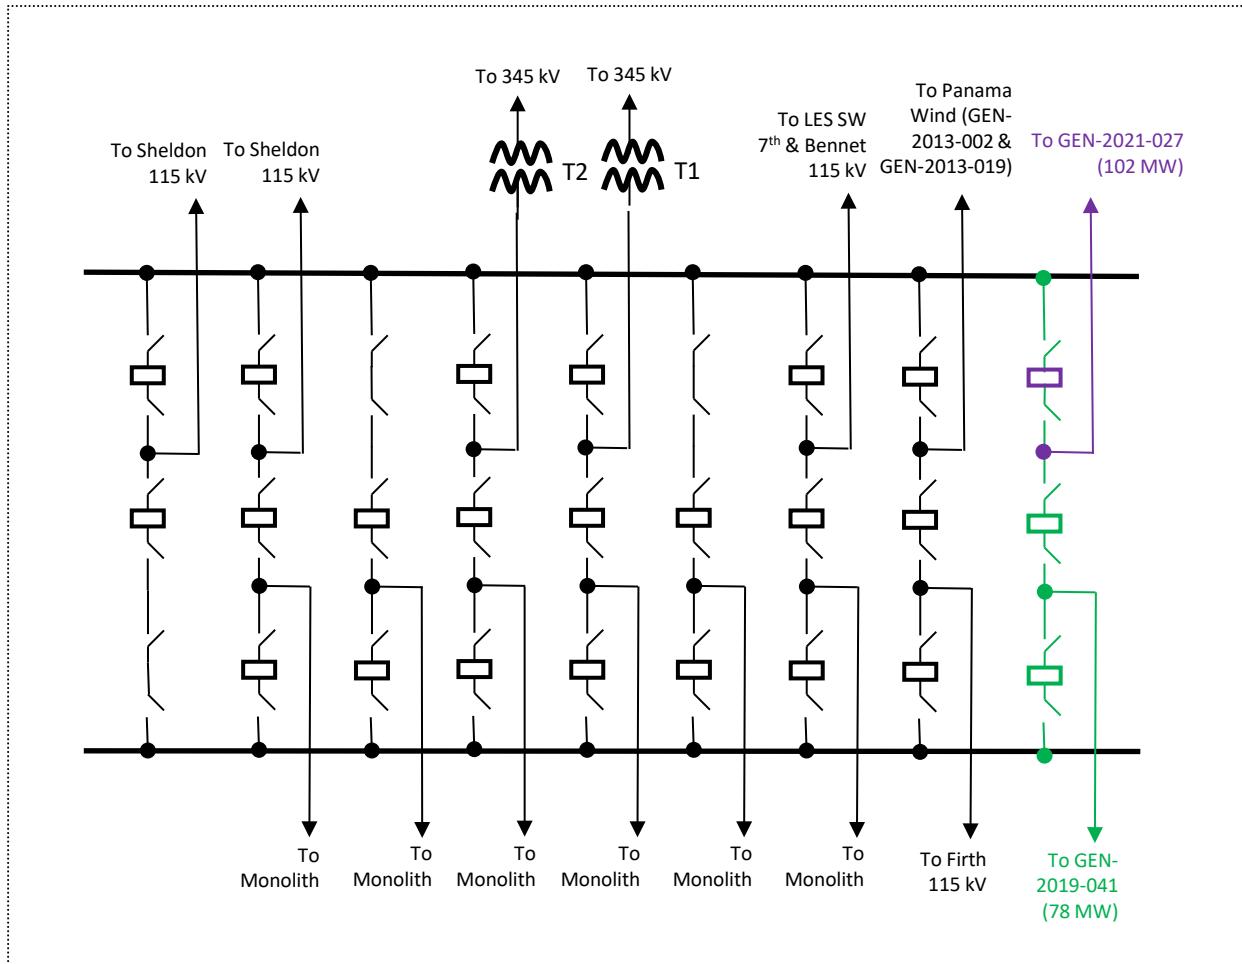

- DISIS-2018-002 and DISIS-2019-001 Interconnection Facilities for GEN-2019-041
- DISIS-2021-001 Interconnection Facilities for GEN-2021-027

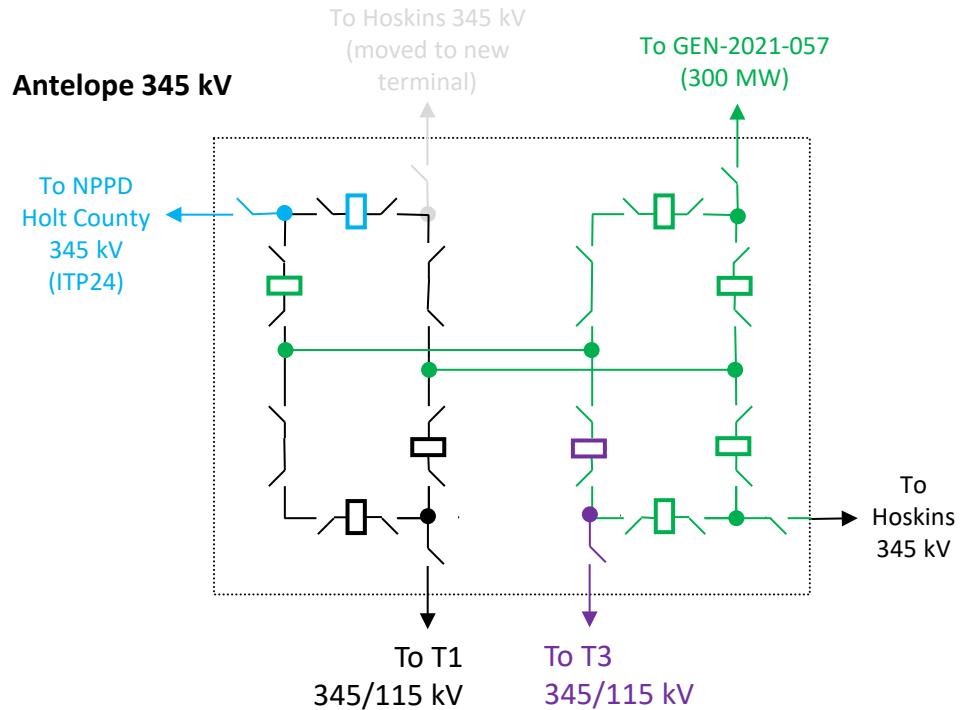

- DISIS-2021-001 Interconnection Facilities for GEN-2021-057
- DISIS-2021-001 Network Upgrade – 2<sup>nd</sup> Axtell 345/115 kV Transformer
- ITP24 Project: Antelope – Holt County 345 kV