




**Interconnection Facilities Study
for GEN-2022-015 Network Upgrades and TOIF upgrades
on the Mingo to Red Willow 345 kV Transmission Line**

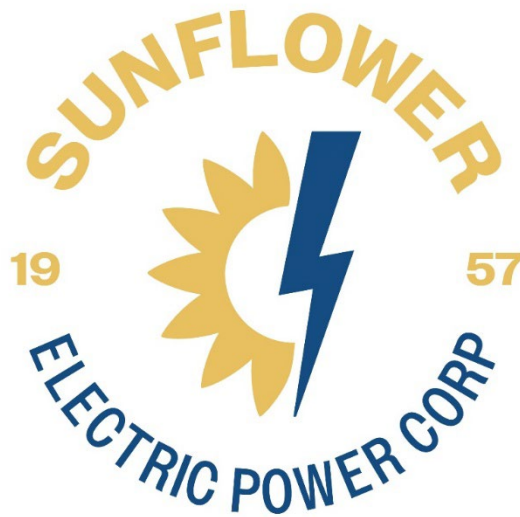

November 3, 2025

*Interconnection Facilities Study – Mingo to Red Willow 345 kV Transmission Line
Network Upgrades and TOIF*

TABLE OF CONTENTS

Study Overview: 2

Interconnection Facilities and Non-Shared Network Upgrades: 2

Interconnection Costs:..... 4

Project Timeline: 4

Interconnection Facilities Study – Mingo to Red Willow 345 kV Transmission Line Network Upgrades and TOIF

STUDY OVERVIEW:

The Southwest Power Pool has requested a Facility Study for Interconnection Facilities and Network Upgrades from Sunflower Electric Power Corporation (Sunflower) on the Mingo to Red Willow 345 kV Transmission Line for request GEN-2022-015. The GEN-2022-015 request consists of a total of 270 MW of solar generation interconnecting on the Mingo to Red Willow 345 kV Transmission Line.

The Non-Shared Network Upgrades (NU) identified to accept a new generator lead includes terminal equipment to accept a new line on the existing Mingo to Red Willow 345 kV Transmission Line. The cost for these Network Upgrades is estimated at \$41,340,382.

The Transmission Owner Interconnection Facility (TOIF) addition identified is a new 345 kV generator lead connection on the existing Mingo to Red Willow 345 kV Transmission Line. The cost for adding the new 345 kV generator lead is estimated at \$5,238,900.

The purpose of this study is to provide estimated costs of facilities required for interconnection of the proposed generation to Sunflower's transmission system and to identify scope and estimated costs for network upgrades required on Sunflower's transmission system to allow the generation to run at the full requested capacity.

Additional network upgrades required for facilities of other transmission owners are not included in this study and will be identified by SPP.

INTERCONNECTION FACILITIES AND NON-SHARED NETWORK UPGRADES:

Non-shared Network Upgrades (NU) additions required by Sunflower consist of the addition of a new 345 kV Substation (ring bus configuration) with circuit breakers, CCVTs, disconnect switches, structures, foundations, conductors, insulators, and all other associated work and materials. It was also identified that OPGW will be needed from Mingo to the new 345 kV substation for protection requirements. OPGW costs have been included for procurement and construction at a high level. No structure analysis or costs associated with structure modifications have been completed at this time.


Transmission Owner Interconnection Facility (TOIF) additions required by Sunflower consist of revenue metering CTs and PTs, disconnect switch, protective relays, and terminal equipment needed to interconnect the customer's generator lead line to Sunflower's new 345 kV Substation.

This 345 kV Substation addition on the Mingo to Red Willow 345 kV Transmission Line shall be constructed and maintained by Sunflower. It is assumed that obtaining all necessary right-of-way for the line into the Sunflower 345 kV substation facilities will be performed by the interconnection customer. The addition of the generator 345 kV lead line from the customer substation into the new Sunflower 345 kV substation and the step-up transformer that connects to the customer's collector substation is not included and is the responsibility of the interconnection customer.

Interconnection Facilities Study – Mingo to Red Willow 345 kV Transmission Line Network Upgrades and TOIF

The proposed arrangement for interconnection of GEN-2022-015 is shown in Figure 1.

Figure 1: One-line Diagram Facilities for GEN-2022-015

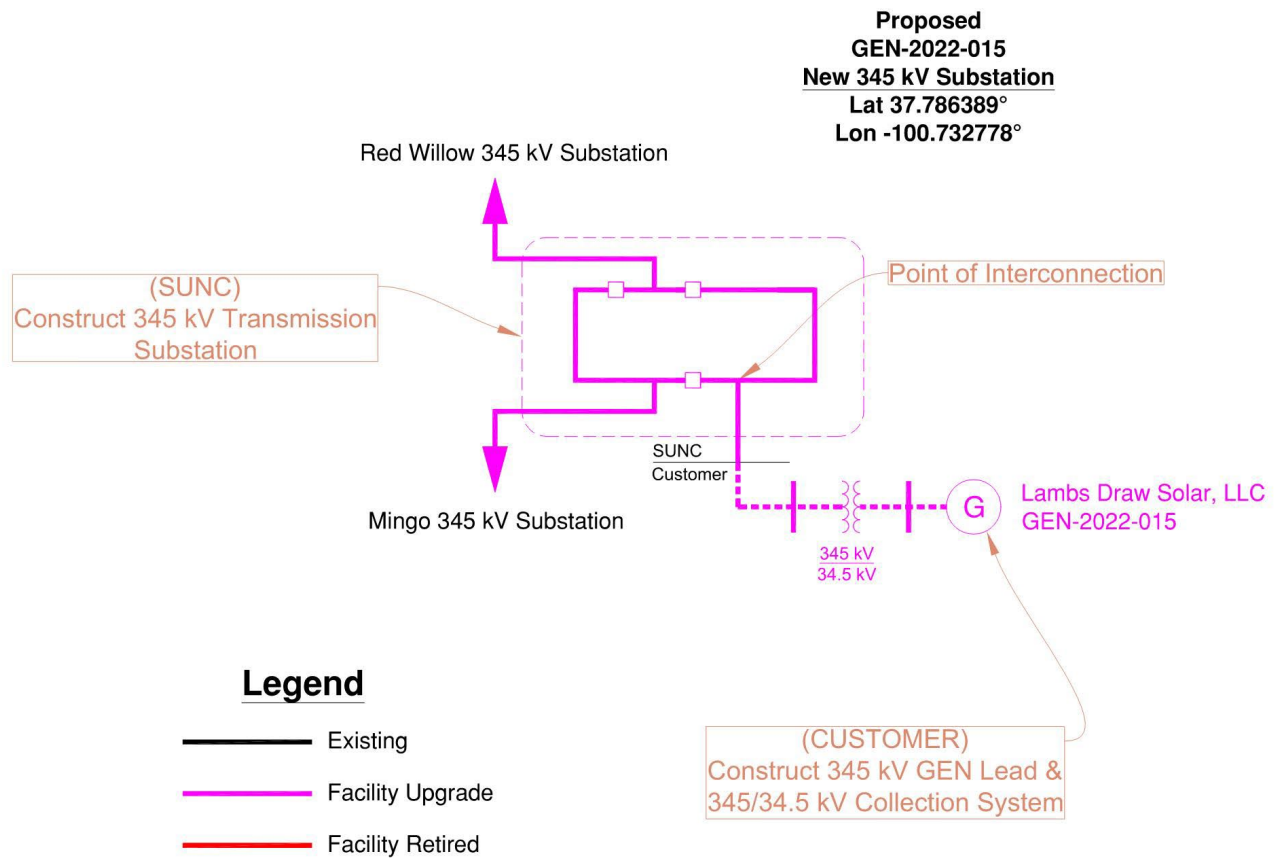

Interconnection Facilities Study – Mingo to Red Willow 345 kV Transmission Line Network Upgrades and TOIF

INTERCONNECTION COSTS:

Summary of interconnection costs for both Interconnection Facilities and Sunflower identified Network Upgrades can be found in the following table.

Upgrade Type	UID	Upgrade Name/Description	DISIS Cost Estimate	DISIS Lead Time
Interconnection	158372	Tap of Mingo – Red Willow 345 kV Line GEN-2022-015 Interconnection (TOIF) (SEPC) Construct one (1) line terminal addition in the new 345 kV substation with revenue metering CTs and PTs, disconnect switch, protective relays, and terminal equipment needed to interconnect the customer's generator lead line.	\$5,238,900	60
Interconnection	158375	Tap of Mingo – Red Willow 345 kV Line GEN-2022-015 Interconnection (Non-Shared NU) (SEPC) Construct the addition of a new 345 kV Substation (ring bus configuration) with circuit breakers, CCVTs, disconnect switches, structures, foundations, conductors, insulators, and all other associated work and materials.	\$41,340,382	60
Total Interconnection Cost:			\$46,579,282	

PROJECT TIMELINE:

Specific construction schedule and milestones will be determined during the Generator Interconnection Agreement negotiations. Sunflower is estimating an engineering and construction schedule for this project as approximately 60 months. Other factors associated with clearances, equipment procurement delays and work schedules could cause additional delays. This is applicable after all required agreements are signed and internal approvals are granted.