



**Facility Study
For
Generator Interconnection
Request
GEN-2012-024
(IFS-2012-002-01)**

***SPP Generator
Interconnection***

(#IFS-2012-002-01)

October 2014

Revision History

Date	Author	Change Description
10/2/2014	SPP	Facility Study Report Issued

Summary

ITC Great Plains (ITCGP) performed a detailed Facility Study at the request of Southwest Power Pool (SPP) for Generation Interconnection request GEN-2012-024 (180 MW/Wind) located in Ford County in Kansas. The Interconnection Request has met the requirements to receive an Interconnection Queue Position, which is designated as IFS-2012-002-01. SPP has proposed the GEN-2012-024 in-service date will be after the assigned Interconnection Facilities Upgrades and Non-Shared Network Upgrades are completed. ITCGP estimates a lead time of 13 months after the Generation Interconnection Agreement (GIA) has been executed for completion of Interconnection Facilities. The request for interconnection was placed with SPP in accordance with SPP's Open Access Transmission Tariff, which covers new generation interconnections on SPP's transmission system.

Phases of Interconnection Service

It is not expected that interconnection service will require phases however, interconnection service will not be available until all interconnection facilities and network upgrades can be placed in service.

Interconnection Customer Interconnection Facilities

The Interconnection Customer will be responsible for all of the transmission facilities connecting the customer owned substation to the Point of Interconnection (POI), at the planned ITC Great Plains 345kV Clark County 345kV Substation. The new ITCGP 345kV substation will be owned and operated by ITC Great Plains (ITCGP). The Customer will also be responsible for any equipment located at the Customer substation necessary to maintain a power factor of 0.95 lagging to 0.95 leading at the POI.

Transmission Owner Interconnection Facilities and Non-Shared Network Upgrades

To allow interconnection the Transmission Owner will need to construct a 345kV breaker and associated equipment for acceptance of the Interconnection Customer's Interconnection Facilities. The estimated in-service date for these Interconnection Facilities is estimated for a lead time of 13 months after the Generation Interconnection Agreement (GIA) is signed. ITCGP estimates Transmission Owner Interconnection Facilities Upgrade costs at \$1,138,472 and Non-Shared Network Upgrades at \$739,826. At this time GEN-2012-024 is responsible for \$1,878,298 of Transmission Owner Interconnection Facilities and Non-Shared Network Upgrades.

Shared Network Upgrades

The Interconnection Customer was most recently studied within the DISIS-2012-002-6 Impact Restudy. At this time, the Interconnection Customer is allocated \$0 for Shared Network Upgrades. If higher queued interconnection customers withdraw from the queue, suspend or terminate their GIA, restudies will have to be conducted to determine the Interconnection Customers' allocation of Shared Network Upgrades.

All studies have been conducted on the basis of higher queued interconnection requests and the upgrades associated with those higher queued interconnection requests being placed in service. At this time, the Interconnection Customer is allocated the following cost for Shared Network Upgrade:

Shared Network Upgrade Description	Allocated Cost	Total Cost
None	\$0	\$0
Total	\$0	

Other Network Upgrades

Certain Other Network Upgrades are not the cost responsibility of the Customer but will be required for full Interconnection Service. These Other Network Upgrades include:

1. Buckner – Spearville 345kV circuit #1 terminal equipment upgrade, assigned to DISIS-2010-002 Customers
2. Spearville – Clark – Thistle – Wichita 345kV double circuit, scheduled for 12/31/2014 in-service
3. Woodward - Thistle 345kV double circuit, scheduled for 12/31/2014 in-service

Depending upon the status of higher or equally queued customers, the Interconnection Customer's in-service date is at risk of being delayed or their Interconnection Service is at risk of being reduced until the in-service date of these Other Network Upgrades.

Conclusion

Interconnection Service for GEN-2012-024 will be delayed until the Transmission Owner Interconnection Facilities and Non-Shared Network Upgrades are constructed. The Customer is responsible for \$1,878,298 of Transmission Owner Interconnection Facilities and Non-Shared Network Upgrades. At this time, the Interconnection Customer is allocated \$0 for Shared Network Upgrades. After all Interconnection Facilities and Non-Shared Network Upgrades have been placed into service, Interconnection Service for 180 MW, as requested by GEN-2012-024, can be allowed. At this time the total allocation of costs assigned to GEN-2012-024 for Interconnection Service are estimated at \$1,878,298.

**Generation Interconnection Facilities Study Report
for GEN 2012-024 – 180 MW Wind Generating Facility
In Ford County, Kansas.
September 25th, 2014**



Table of Contents

1.0 Overview	3
1.1 Facility Study Summary	3
2.0 Voltage Requirements	4
3.0 Network Upgrades.....	4
4.0 Transmission Owner Interconnection Facilities	9
5.0 Interconnection Customer Interconnection Facilities	11
6.0 Right of Way Requirements	11

1.0 Overview

ITC Great Plains (“ITCGP”) has performed a facility study at the request of Southwest Power Pool (“SPP”) for Generation Interconnection request GEN-2012-024 under the SPP Open Access Transmission Tariff. The subject request entails interconnecting a 180 MW wind powered generation facility in Ford County, Kansas. It is proposed to be in service by December 31, 2015.

The ITCGP scope of this facility study is to provide a cost estimate for the Customer’s interconnection facilities. This study does not directly address any of the network upgrades that may be identified in the DISIS, the facilities that are being constructed by the interconnection customer, or any potential sub-transmission facilities (if any) that may be required.

1.1 Facility Study Summary

ITCGP estimates the total project cost of the customer’s interconnection facilities will be **\$ 1,878,298** (+/- 20 % accuracy) including applicable company overheads and potential tax gross ups in 2014 dollars. It includes **\$ 1,138,472** for Network Upgrades and **\$ 739,826** for Transmission Owner Interconnection Facilities. It is further estimated that the required legal/real estate acquisition and construction activities will require approximately 13 months after the GIA is executed. This report contains additional details regarding the estimate as well as results of short circuit studies, review of reactive compensation, and information on Interconnection & Operating requirements.

The GEN 2012-024 interconnection facilities will require Network Upgrades on the ITCGP system to connect the new generation. Network Upgrades consist of adding one 345kV breaker and associated disconnect switches at the Clark County substation.

In addition to the identified Network Upgrades, there are specific Interconnection Facilities which ITCGP will construct, own, operate, and maintain. These facilities include the new line entrance structures and 345kV disconnect switch on the end of the radial line from GEN 2012-024 at the Clark County substation, as well as any ITCGP relaying and control equipment required for the protection of the developer’s radial line.

The Interconnection Customer is responsible for constructing all sole-use facilities such as the wind farm collector station and the radial 345kV line from the collector station to the Clark County substation. While this report does define Interconnection Customer owned Interconnection Facilities in enough detail to explain basic requirements, it does not define or contain all of the detailed requirements. Additional metering, communications, and operational requirements may be identified as the Interconnection and Operating Agreements are developed and further communications between the Transmission Owner and Interconnection Customer take place. The Interconnection Customer’s low voltage system is not defined in this report.

2.0 Voltage Guidelines:

Reactive power, voltage regulation and operating requirements will be as per Transmission Operator (TOP) and Transmission Provider directives. Interconnection Customer will operate the generating facility to a voltage schedule of 354 kV (1.026 pu) with a bandwidth of +/- 6 kV (0.017 pu) at the Point of Interconnection (POI) utilizing the Generating Facility's required power factor design capability as indicated in SPP DISIS-2012-002. As per SPP DISIS 2012-002, the Interconnection Customer's required power factor capability is 0.95 lagging to 0.95 leading (at the POI).

For further clarification, the Interconnection Customer may meet the +/- 0.95 power factor requirement by utilizing reactive capability from the wind generators or by adding external reactive compensation. Note that any reactive compensation installed by the Interconnection Customer shall not cause voltage distortion in accordance with Article 9.7.6 Power Quality of the Generation Interconnection Agreement.

The Interconnection Customer will regulate the Generating Facility's voltage to the specified voltage set-point within the defined bandwidth stated above using an automatic voltage controller utilizing the inherent reactive power capability in the wind turbines and if applicable external reactive compensation.

The above voltage schedule is subject to change. If the need for a change is identified, it will be done within the limits of the GIA provisions stated in Section 9.6 and the Generating Facility's power factor design criteria as stated above. If a schedule change is needed, appropriate written documentation of the change will be provided to the Interconnection Customer.

The Interconnection Customer is required to have a generator operator available for 24/7 communication with the TOP. The TOP may, at any time request a variance from the schedule in response to system operating/security requirements.

3.0 Network Upgrades

3.1 Project Location:

The generation facility will interconnect at the Clark County substation located in Clark County, Kansas.

3.2 Project Overview:

The purpose of this project is to add one 345 kV breaker and associated disconnect switches at the Clark County substation to provide a transmission system interconnection for the GEN 2012-024 wind farm.

3.3 Design Criteria:

The Transmission Owner's standards will be applicable. Where no applicable standards are available, the Transmission Owner will substitute industry standards and other good utility practices.

3.4 One-Line Diagrams:
See Figure 1 for Transmission Owner One-Line.

GEN-2012-024 Interconnection at Clark County Switching Station

A large black rectangular redaction box covers the majority of the page. Centered within this box is the text: "Redacted upon request from Transmission Owner for CEII Protection".

Redacted upon request from
Transmission Owner for
CEII Protection

Figure 1 GEN-2012-024 ITCGP Interconnection substation one line diagram

3.5 Site Plan:

See Figure 2 for site plan of Transmission Owner switching station at the POI at the Clark County 345kV substation. The equipment that needs to be added to accommodate the customer's interconnection request is shown in red.

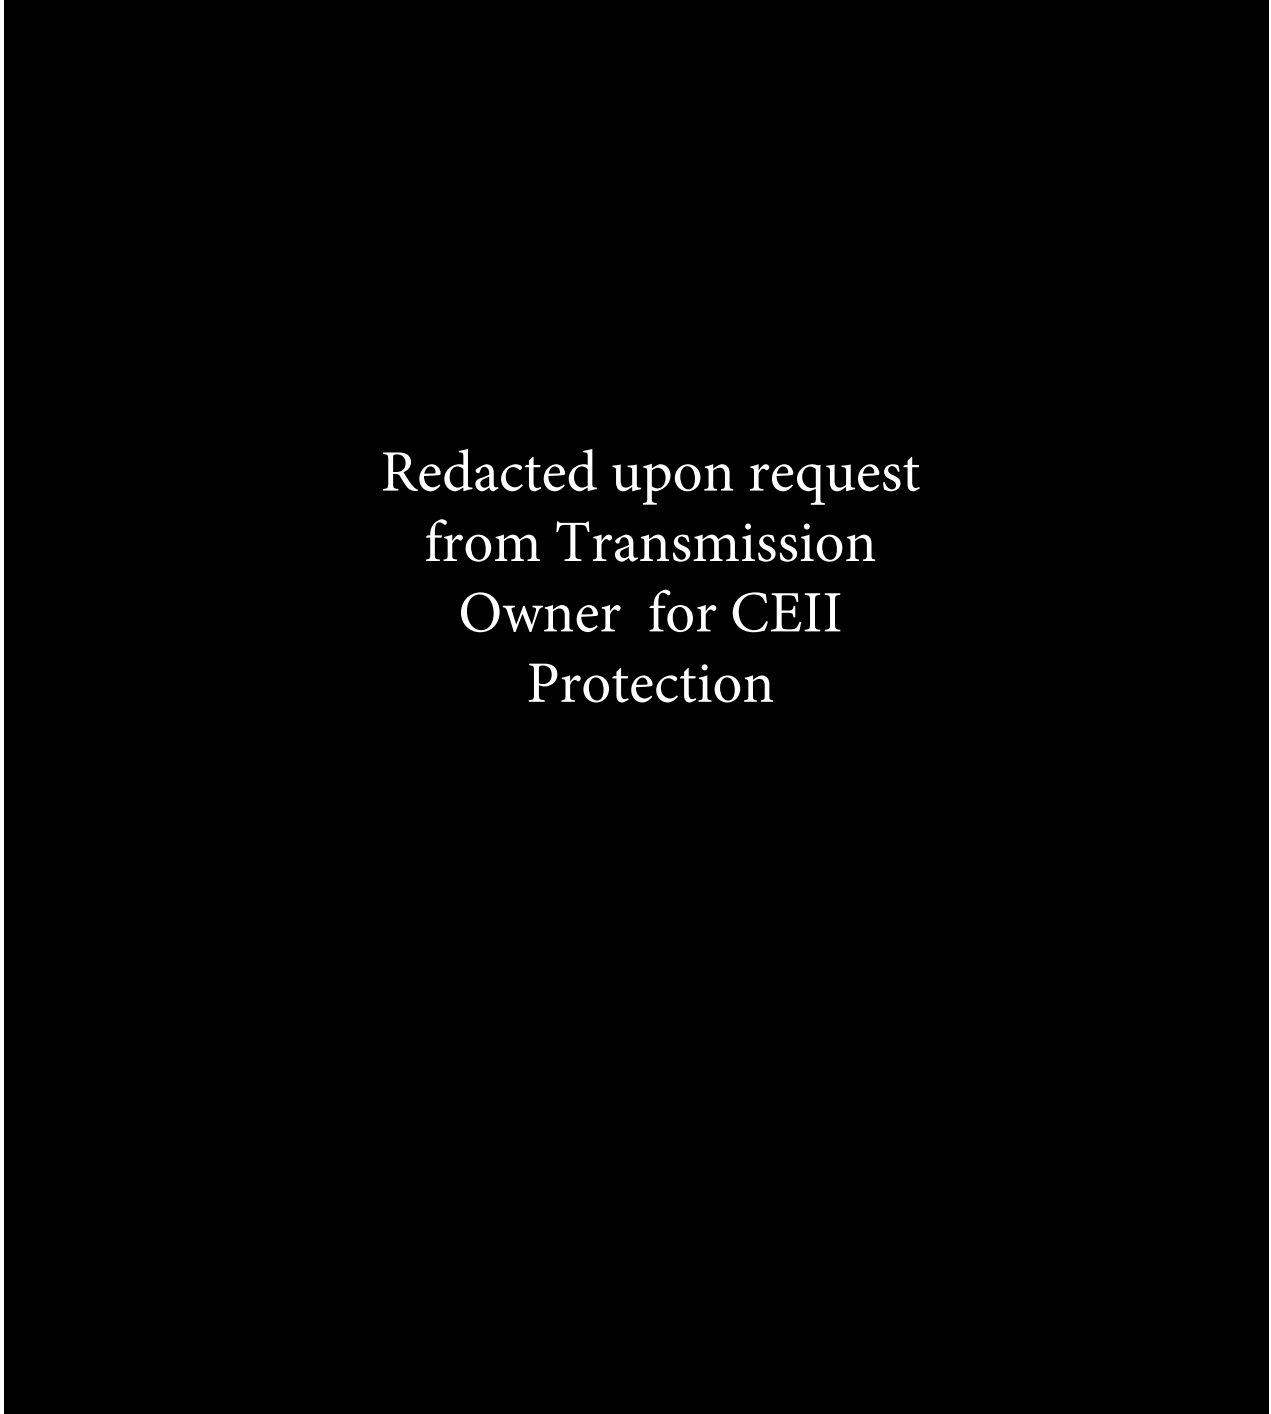


Figure 2 GEN-2012-024 ITCGP Clark County substation site plan

3.6 Route Information: N/A

3.7 Right-of-Way Information:

It is assumed that the interconnection customer will be responsible for building the 345 kV line required to connect the ITCGP Switching Station at the POI with the customer's substation. As such, the interconnection costs contained herein do not include any costs for extending the ITCGP transmission line. Please see section 6 for general guidelines.

3.8 Permitting:

The Interconnection Customer will be responsible for satisfying all community or governmental site plan or zoning approval requirements which may include wetland or flood plain permits. The Transmission Owner will be responsible for the control center building permit and the KDHE storm water construction permits associated with the Transmission Owner portions of the construction.

3.9 Metering & Ownership Demarcation:

Covered in section 4.9

3.10 Protection & Control Overview:

One 345kV breaker control panel with microprocessor based relays will be installed. Breaker failure protection, automatic reclosing supervised by synchronism check will be provided.

3.11 Insulation Coordination:

345kV, 1050kV BIL

3.12 Short Circuit Study Results - Bus Fault Levels:

ITCGP calculated bus fault levels for the interconnection substation and adjacent substations to determine if the added generation will cause fault currents to exceed interrupting ratings for existing equipment and for use in sizing future equipment. Calculations are based on data for the interconnection transformer and installed wind turbines supplied by the Interconnection Customer. Variance from supplied data could materially change calculated short circuit values. Results are displayed in Table 1.

Table 1 – Short Circuit Results

Fault Location	Maximum Fault Current (Amps)*	
	Phase	Ground
Clark County 345kV substation	14876	16092
Spearville 345 kV substation	15304	17312
Thistle 345 kV substation	15062	9775

Fault currents shown in Table 1 are within the circuit breaker interrupting capabilities with the addition of 180 MW contributed by GEN-2012-024.

3.13 Reactive Compensation:

ITCGP evaluated the impact of the proposed interconnection on the reactive compensation equipment presently planned or in service for the Clark County substation facilities. ITCGP studies concluded that there was no requirement for additional reactive compensation at the Clark County substation for the addition of 180 MW of GEN 2012-024.

3.14 Other Equipment's & Materials:

- Gas Circuit Breakers (GCB): One (1) 345 kV, 3000A rated, 63kAIC.
- Disconnect Switch: Two (2) 345 kV, 3000A rated, 1050 kV BIL.
- Insulators: Three (3) 345 kV, 1050 kV BIL station post, porcelain.
- Control Cable: Control cables per Transmission Owner standards will be installed in direct buried PVC conduits, above grade LFMC conduits and in pre-cast cable trench. All control cables from the yard will be terminated at the relaying control panels. The control building will have overhead cable trays for necessary cable runs and inter-panel connections.

3.15 Relaying, Control, & SCADA:

Panel Requirements

- 1 – RD3024 –Breaker Control (SEL-351S)

3.16 Grounding System:

The grounding system will be designed and installed per Transmission Owner's standards. These standards follow the IEEE 80 standards.

3.17 Lightning Shielding Design:

Lightning shielding will be provided per Transmission Owner's standards. Multiple H-frame structures along with shield wire will be used for lightning protection.

3.18 Yard Lighting:

Yard lighting will be installed to be sufficient for visual indication of the disconnect switch positions or egress of personnel, and will not serve as task lighting.

3.19 Structures:

The required new outdoor steel structures listed below will be hot-dipped galvanized wide flange structures or tubular steel:

- Two (2) 345 kV disconnect switch stands

3.20 Foundations:

Foundations and slabs will be designed and installed in accordance with the owner's standards and specifications. The minimum design depth to firm bearing is contingent upon soil borings at the site.

3.21 Scheduling Requirements:

Legal/Real Estate Procurement	9 weeks
Material Procurement / Design	52 weeks
Substation Construction	26 weeks
Closeout Activities	4 weeks

3.23 Total Cost of Network Upgrades: \$ 1,138,472

Total Cost Estimate Accuracy: +/- 20%

Note that the cost estimate provided is expressed in 2014 terms and includes applicable company overheads and potential tax gross ups.

4.0 Transmission Owner Interconnection Facilities

4.1 Project Location:

The generation facility will interconnect at the Clark County substation located in Clark County, Kansas.

4.2 Project Overview:

New line entrance structures will be added at the Clark County substation for termination of the line from the collector substation. A disconnect switch will be installed beneath the first structure for isolation of the developer's line. Line relaying will be added to protect the line. A set of CCVT's and surge arresters will be added to the line terminal.

4.3 Design Criteria:

The Transmission Owner's standards will be applicable. Where no applicable standards are available, the Transmission Owner will substitute industry standards and other good utility practices.

4.4 One-Line Diagrams: See Figure 1

4.5 Site Plan: See Figure 2.

4.6 Route Information: N/A

4.7 Right-of-Way Information: N/A

4.8 Permitting: Same as that covering section 3.8

4.9 Metering & Ownership Demarcation:

The Interconnection Customer or others will provide, own, operate and maintain revenue metering. The specifics of the revenue metering will be defined during the detailed engineering phase of the project. The customer must cooperate with the Transmission Provider and local Transmission Owner requirements in the metering design. Revenue metering equipment will be required at customer's project substation with loss compensation to the Point of Interchange in the Transmission Owner's substation.

The ownership demarcation will be at the first substation steel H-frame within the security fence of the Transmission Owner substation.

The Interconnection Customer will be required to provide enough conductor to terminate on the H-frame and extend down to reach grade level.

4.10 Protection & Control Overview:

- One set of 345kV CCVTs will be installed on the Gen 2012-024 line.
- Two paths of fiber optic cable (OPGW) will be required for line protection. They will be supplied by the Interconnection Customer.
- One 345kV line relaying panel with microprocessor based relays will be installed.

4.11 Insulation Coordination:

345kV, 1050kV BIL

4.12 Short Circuit Study Results - Bus Fault Levels: See Section 3.12 above

4.13 Other Equipment & Materials:

- Disconnect Switch:
One (1) 345 kV, 3000A rated, 1050 kV BIL.
- CCVTs: Three (3) 345 kV, 3-winding, 1550kV BIL.
- Surge Arresters:
Three (3) 345 kV, vertical mount, 209 kV MCOV, polymer.
- Control Cable
Control cables per Transmission Owner standards will be installed in direct buried PVC conduits, above grade LFMC conduits and in pre-cast cable trench. All control cables from the yard will be terminated at the relaying control panels. The control building will have overhead cable trays for necessary cable runs and inter-panel connections.

4.14 Relaying, Control, & SCADA:

Panel Requirements: One RD3048 Panel – Fiber optic current differential (SEL 311L Relays)

4.15 Grounding System:

The grounding system will be designed and installed per Transmission Owner's standards. These standards follow the IEEE 80 standards.

4.16 Lightning Shielding Design:

The attachment of the OPGW shield wire from the developer's line to the H-frame will provide lightning protection for the Interconnection Facility equipment at GEN 2012-024 interconnection substation.

4.17 Yard Lighting:

Yard lighting will be installed to be sufficient for visual indication of the disconnect switch position or egress of personnel, and will not serve as task lighting.

4.18 Structures:

The required new outdoor steel structures listed below will be hot-dipped galvanized wide flange structures or tubular steel:

- One (1) 345 kV disconnect switch stands
- Three (3) H-frame line entrance structures
- Three (3) 345 kV CCVT stands
- Three (3) 345 kV surge arrester stands

4.19 Foundations:

Foundations will be designed and installed in accordance with the owner's standards and specifications. The minimum design depth to firm bearing is contingent upon soil borings at the site.

4.20 Conductors, Shield Wires, & OPGW: N/A

4.21 Insulators: N/A

4.22 Removal of Existing Facilities: N/A

4.23 Site Work: N/A

4.24 Total Cost: \$ **739,826**

Total Cost Estimate Accuracy: +/- 20%

Total Project cost (Network Upgrades and Interconnection facilities): \$ 1,878,298

Note that the cost estimate provided is expressed in 2014 terms and includes applicable company overheads and potential tax gross ups.

5.0 Interconnection Customer Interconnection Facilities

All facilities within the Interconnection Customer's collector substation and between the Interconnection Customer's substation and ITCGP's Clark County substation are not included in this report and are the sole responsibility of the Interconnection Customer. Some of the key facilities are briefly mentioned below. The Point of Interconnection (POI) and the Point of Change of Ownership (PCO) are shown in Figure 1 above.

The Interconnection Customer shall construct an approximate 5.57 mile 345 kV radial line from the wind farm collector station to ITCGP's Clark County substation. Installation of OPGW shield wire on the radial line from GEN 2012-024 containing at least 12 single mode fibers will be required for ITCGP relaying and communication purposes.

The customer's step-up transformer between the wind farm's 34.5 kV collector network and the 345 kV facilities will require a high side breaker capable of interrupting a transformer high side winding fault.

All Interconnection Customer owned 345 kV apparatus as well as the revenue metering equipment located in the Interconnection Customer's substation shall comply with ITCGP standards and will be subject to ITCGP approval. ITCGP will provide the Interconnection Customer with standards during detailed design or upon request. The Interconnection Customer is solely responsible for the SCADA and telecommunications facilities necessary to operate and monitor its facility.

Necessary trip and close signal interlocks will be provided by ITCGP to the Interconnection Customer's generation facility for the safe operation of the system. Interconnection Customer will provide breaker status and current transformer signals to ITCGP for system operation and protection.

Total Project Cost: N/A

Total Cost Estimate Accuracy: N/A

6.0 Right Of Way Requirements

The Interconnection Customer shall obtain easements from the Transmission Owner to work in or drive through the Transmission Owner's transmission line right-of-way. The Transmission Owner and Interconnection Customer will also cooperatively negotiate any easements required for the Interconnection Customer's transmission lines and structures. The Transmission Owner agrees to not unreasonably withhold easements.

For the Network Upgrades and any Transmission Owner Interconnection facilities identified in this report, the Transmission Owner agrees to obtain all necessary easements/right-of-way as required to construct those facilities that will be owned and operated by ITCGP.